LINCOLN COUNTY

DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 02/27/08 Expiration Date: 02/28/09

Property Owner: Michael Draycott c/o: Jere Johnson

Address: [redacted]

Telephone: (Home) (Work)

Installer: License No.

XX New Installation _____ Existing System

_____ Repair _____ Replacement _____ Extension _____ Other

Describe: Installing pressure-dosed system in 3-foot wide trenches. Gravelless chambers are specified for utilization in drainfield construction

Parcel Description:

Legal: Sw-1/4 S15 & NW-1/4 S22 T37 R27

Address or Location: Lot 2 of Lemer Subdivision

Approved Design Criteria:

Bedrooms 4 Septic Tank Size: 1500 gallons Drainfield Size: 375 Square Feet

Dosing Tank Size: 500 gallons

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL PRESSURE-DOSED SYSTEM IN GRAVELLES CHAMBERS ACCORDING TO LAYOUT, DESIGNER'S DETAILS, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: *Kendra J. Lind, R.S.*

Closure Statement:

I, _____, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____


Title: _____

NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-293-7781

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

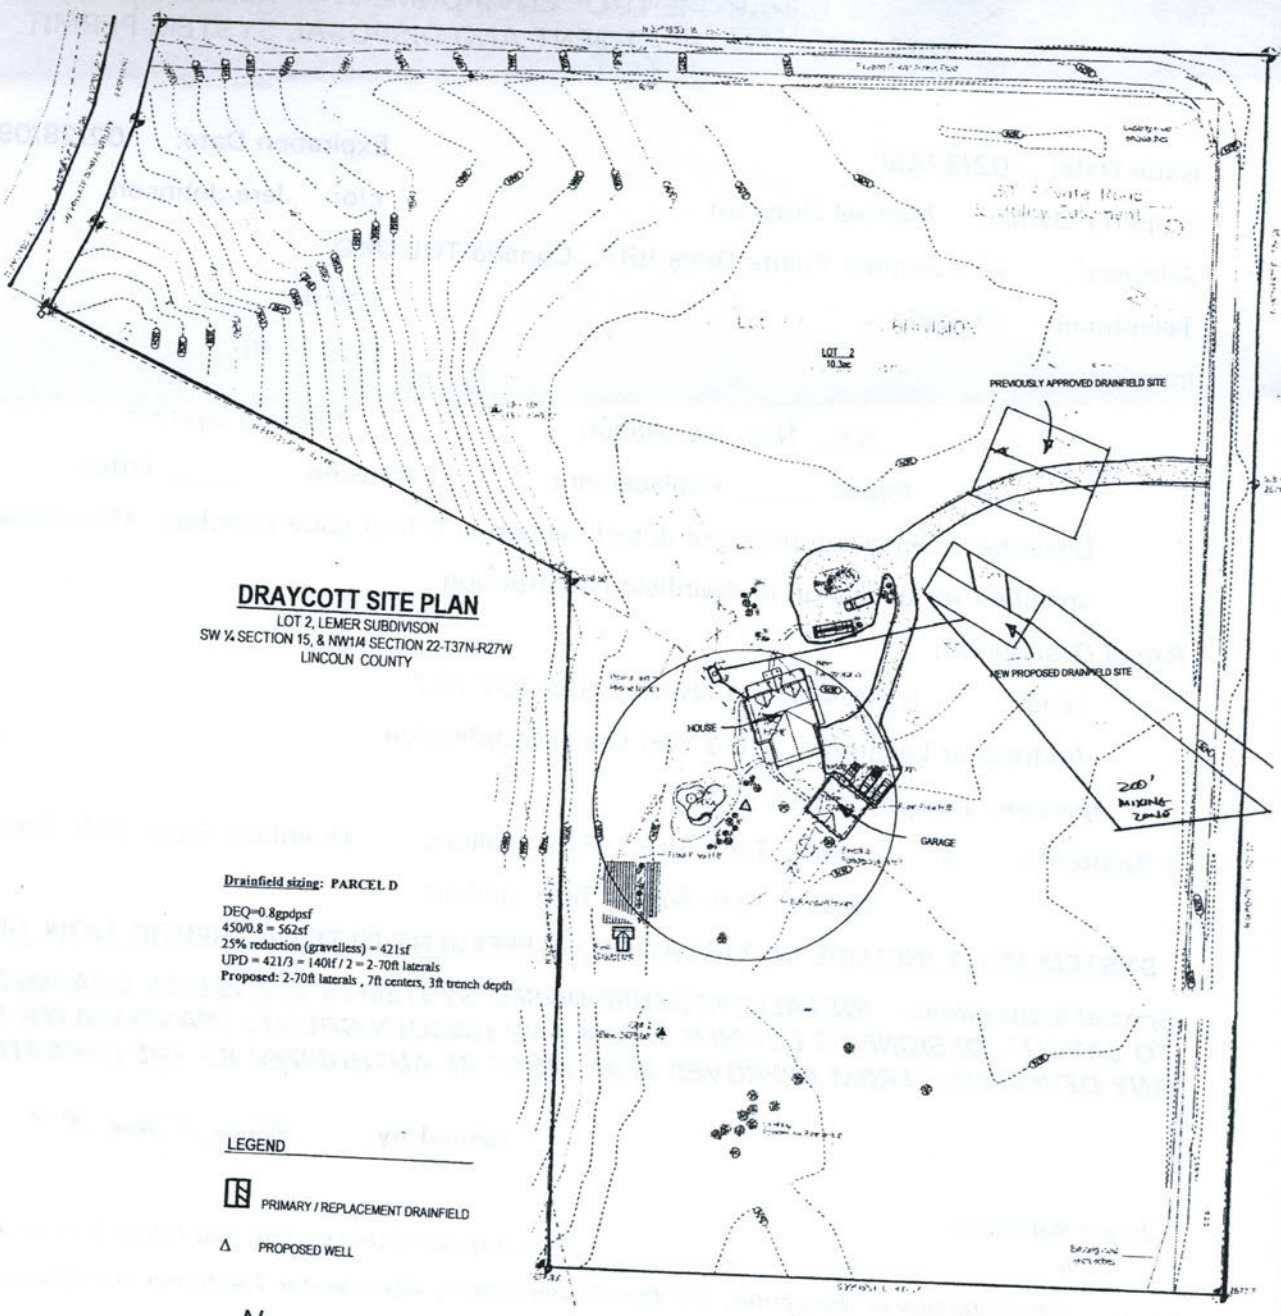

DRAYCOTT SITE PLAN

LOT 2, LEMER SUBDIVISON
SW ¼ SECTION 15, & NW1/4 SECTION 22-T37N-R27W
LINCOLN COUNTY

Drainfield sizing: PARCEL D

DEQ=0.8gpdpsf
450/0.8 = 562sf
25% reduction (gravelless) = 421sf
UPD = 421/3 = 140lf / 2 = 2-70ft laterals
Proposed: 2-70ft laterals , 7ft centers, 3ft trench depth

LEGEND

PRIMARY / REPLACEMENT DRAINFIELD

Δ PROPOSED WELL

N

1" = 80'

Jere Johnson, R.S
Environmental Health Consulting
4572 Whitefish Stage Road
Whitefish MT 59937