LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 05/23/2025(Renewal) 07/03/2023 Expiration Date: 05/22/2026 Permit#25-5535

Property Owner: Robert Jacobson

Installer: Dale Schmidt License #: 217

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of gravity system for 1 Bedroom House with chambers.

Parcel Description:

Legal: PINE BAY NO 2, S15, T36 N, R28 W, LOT 42, ACRES 0.562, SEC 15&22

Property Address: 80 Pine Cone Ln., Rexford, MT 59930 Assessment Code: 5535

DEQ COSA: EQ#27-77-K855 Date: 08/17/77

Approved Design Criteria: Installation of new gravity system for 1 Bedroom House with 1 Lateral @ 44' with reduction for chambers.

# of Bedrooms: 1	Septic Tank Size: 1000 gallons	Trench Width: 24"
# of Laterals: 1	Length of Laterals: 44'	Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: Robin Blumberg, R.S.

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.


Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: Robin Blumberg *Date:* 6/5/25

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

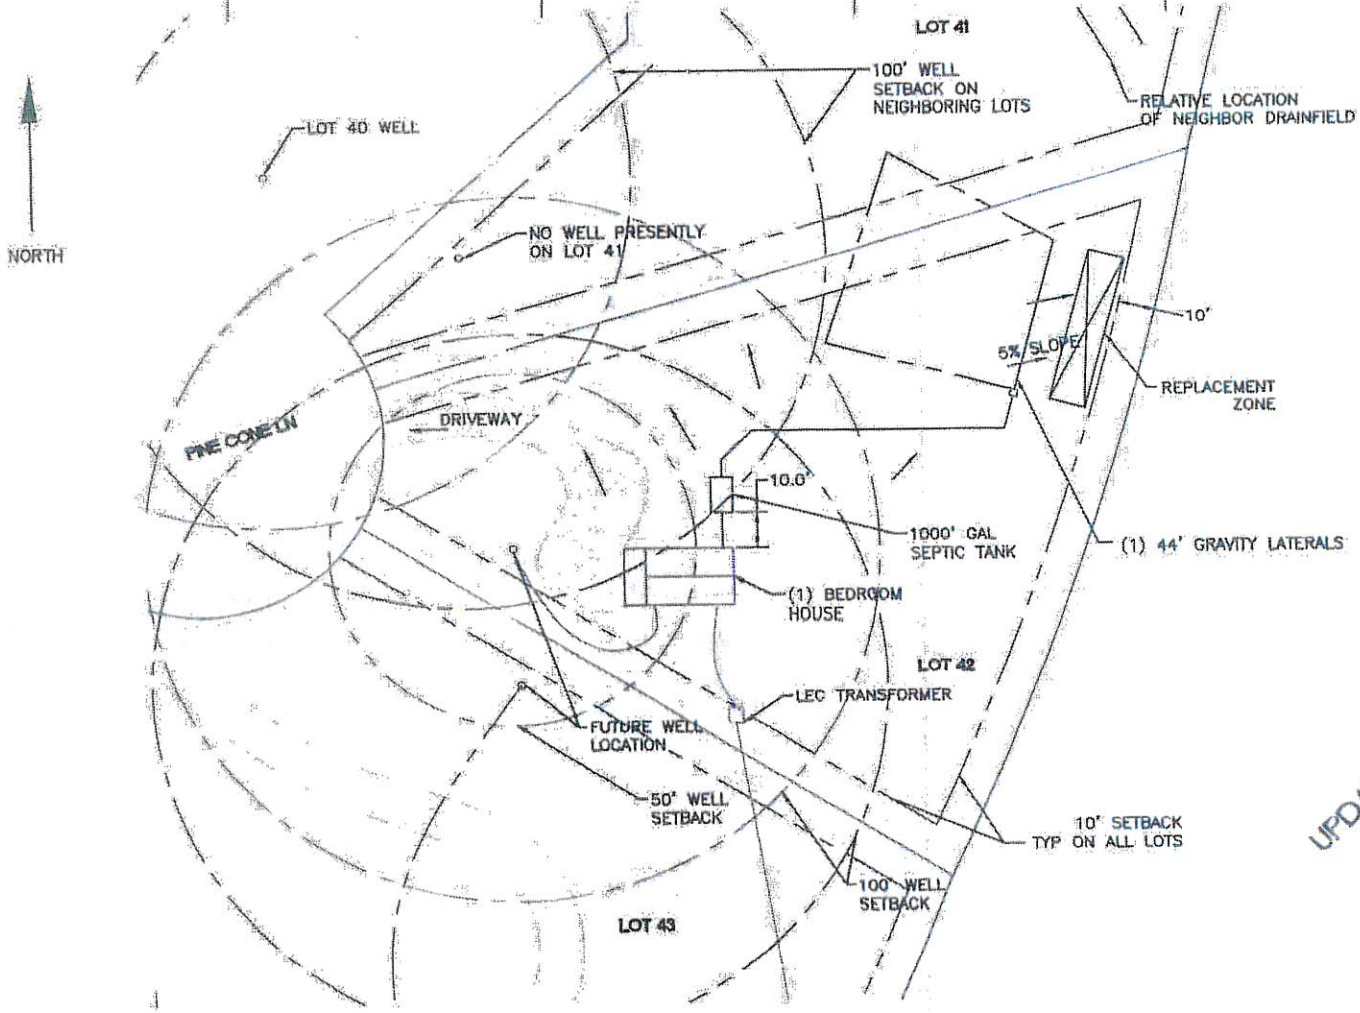

DRAINFIELD SIZING

85 SQFT/BEDROOM PER COSA
(1) BEDROOM= 85 SQFT
85 SQ FT/2' CHAMBERS= 44 LF
(1) LATERAL= 44' LONG

LOT 42

0.562 ACRES
80 PINE CONE LANE, REXFORD, MT 59930
S15, T36N, R28W, PINE BAY NO 2
ASSESSMENT #0000005535
GEO 56-4822-15-1-07-07-0000

UPDATED 7-2-23

ROBERT JACOBSON SITE LAYOUT

REV	DESCRIPTION	BY/DATE	APRD/DATE

REV	DATE	COMPANY	SCALE	DRAWN BY	MONTANA DESIGN SERVICES, INC.
		MDS	1/16 = 1'-0"	JA'S DR.	JACOBSON SEPTIC
		DRAWN	DATE	CHECKED BY	SITE LAYOUT
		VERIFY	SCALE	7-2-23	6/20/23
		PLOT FILE	WEIGHT	PROJ NO	S. Burgett 6/20/23
		PW-0001			MDS-001