LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 10/27/2020 Expiration Date: 10/27/2021

Property Owner: Mike Conte c/o:

Address: [redacted]

Telephone: [redacted] (Home) (Work)

Installer: Dwane Smith License No. 99

__XX__ New Installation ____ Existing System

____ Repair ____ Replacement ____ Extension ____ Other

Describe: Three 65' Laterals using chambers.

Parcel Description:

Legal: S3 T33 R33 Parcel B-1 Conte FT COS #

Address or Location: NHN Thunder Road and Pine Creek Road

Geo/Assessors code:

Approved Design Criteria:

Bedrooms: 3 Septic Tank Size: 1000 gallons Drainfield Size: 195 Lineal Feet

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: Jake Mertes, R.S.

Closure Statement:

I, MEL SMITH *, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.*

Signed: Melvin Smith *Date:* 11-6-20

Title: _____

NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-283-2442

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

EQ 20-1160

OLN COUNTY MONTANA

OT LAYOUT:
MILY TRANSFER
RCEL B-1


rtion of Government Lots 1 & 2 in the N1/2 NE1/4 of Section 3,
33 N., R. 34 W., P.M.M.
ichael F. & Bette K. Conte
April 2019
0-1160

Reviewed by the Local Reviewing Authority.
Under contract with the
Department of Environmental Quality

Local Reviewer — Date 7/24/2020

Accepted under contract

DEQ Representative — Date 8/7/20

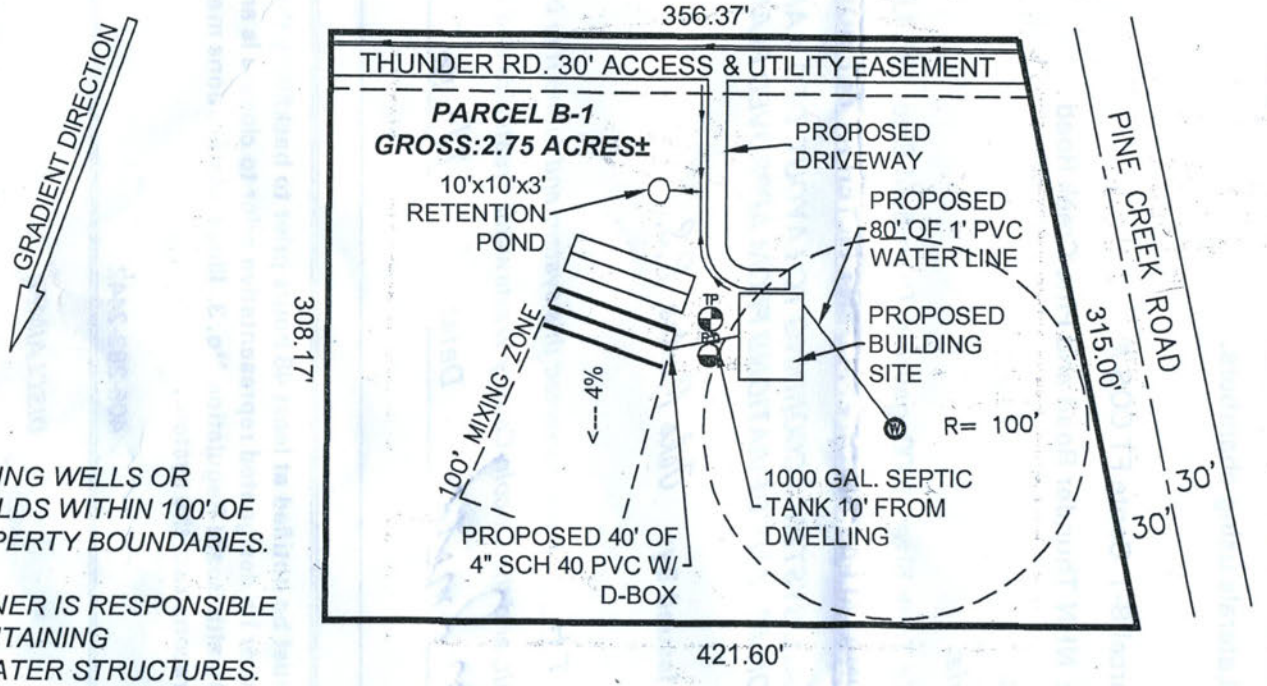

LEGEND

- TP — SOILS PROFILE
- PT — PERCOLATION SITE
- W — PROPOSED WELL SITE
- <--- SLOPE
- — STORM DITCH & POND
- PROPOSED SEPTIC SITE 3-24"X 65' TRENCHES 10' APART
- REPLACEMENT SITE 3-24"X 65' TRENCHES 10' APART


STANDARD ABSORPTION TRENCHES GRAVITY FED

ES:

EXISTING WELLS OR
INFIELDS WITHIN 100' OF
PROPERTY BOUNDARIES.

DOWNER IS RESPONSIBLE
MAINTAINING
RMWATER STRUCTURES.

DETAIL OF DITCH



RECEIVED
JUL 28 2020
MT DEQ PUBLIC WATER & SUBDIVISIONS

ABINET MOUNTAIN SURVEYING, LLC
TROY, MT 59935

/29/19	Land Projects 2019
Y: CJR	FILE: t33r34sMC.dwg

Graphic Scale:
100 0 50 100
1 inch = 100 ft.

NOTES:

3 BEDROOM HOME: 300 gal/day
APPLICATION RATE: .8
375sq.ft. ABSORPTION TRENCH REQUIRED
390sq.ft. ABOSRPTION TRENCH PROPOSED