## **CERTIFIED CORNER RECORDATION**

Corner MS 7365 Cor. 4 Sec. 12 T. 26N R. 31W P.M.,MT Lincoln County DOUBLE LODE

I. <u>1904 Original Mineral Survey by U.S. Deputy Mineral Surveyor Abram L. Jaqueth:</u> Set a quartzite stone 28x15x8 ins. 22 ins. deep chiseled 4-7365 for Cor. No. 4; from which:

A hemlock tree 15 ins. diam. bears \$24°38'E, 132.70 ft. A hemlock tree 24 ins. diam. bears \$24°43'E, 118.90 ft. Both trees are blazed and scribed B.T. 4-7365.

- II. Found fractured quartzite stone 9x6 ins. with visible chisel mark "73". No evidence of original bearing trees was recovered.
- III. At the found stone position, set a 2 ½ x 30 in. diam. aluminum pipe 24 ins. in the ground with a 3 ¼ in. diam. aluminum cap marked as shown below from which:



A subalpine hemlock, 12 ins. diam. bears S 30°W, 12.10 ft. distant scribed (4-MS 7365 BT). A subalpine hemlock, 8 ins. diam. bears N 57°E, 6.35 ft. distant scribed (4-MS 7365 BT).


Attach bearing tree and land survey monument signs to both trees.

Paint scribed faces and 6 in, wide bands red on both trees.

Buried original stone monument alongside set monument.

Removed all brush and debris in a 10.0 ft. radius from around set corner.

The Geiger Lake Trail bears S 68°E, 22.00 ft. distant, set MS K-Tag at trail crossing.

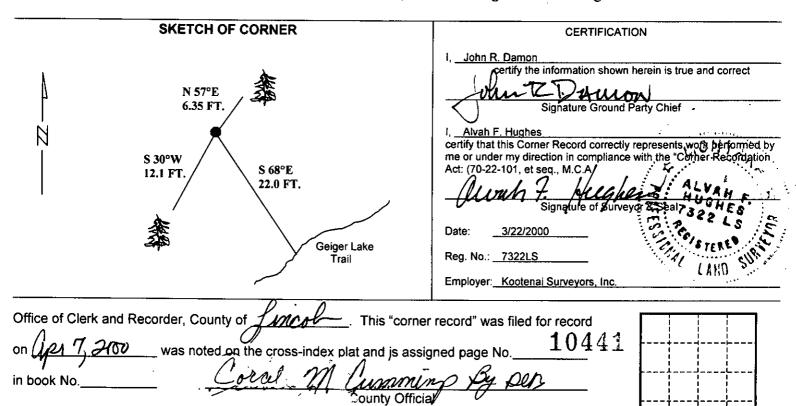

Cross Index No.

T.

R.

P.M.,MT

• - corner this sheet