INSTRUCTIONS

- Original and/or subsequent record used to evaluate the corner position.
 Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated
- 3. Description of monument and accessories set to perpetuate the corner position.
- Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography tles, position of accessories, etc.
 Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
- 6. Fill in Cross Index & Section Diagram at bottom of sheet.

Magnetic declination: 20° East


CERTIFIED CORNER RECORDATION

T. ______R. _____P.M.M. C-W-SE-NE 1/256 S29 Corner . County 1990 BLM records: BLM plat and records not approved at this date. Found a 2 1/2 ins. diam. iron pipe, 2 ins. above ground, with 3 1/4 ins. diam., BLM brass cap, C-W-SE-NE 1/256 \$29 1990 From which: A larch, 15 ins. diam., bears N58 E, 14.7 ft. dist., mkd. C-W-SE-NE 1/256 S29 BT. A cedar, 16 ins. diam., bears S53 E, 18.2 ft. dist., mkd. C-W-SE-NE 1/256 S29 BT.

III. Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.



corner this sheet

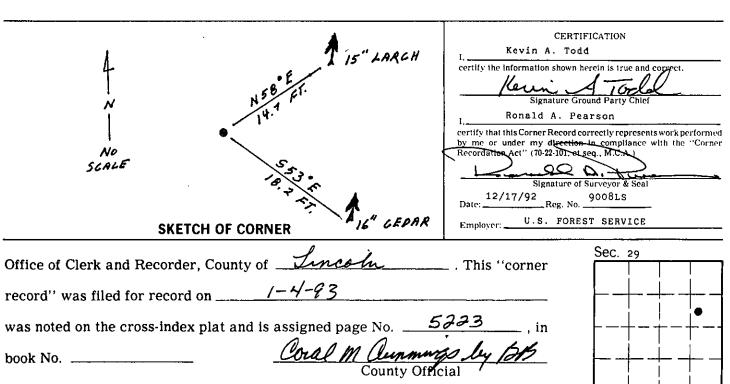

_ T. ____ R. __32w

Cross Index No. _____.58-8.25