

# INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner M.C. S 31 | S 32 North Bank T. 27 N R. 27 W P.M.M. LINCOLN County

ORIGINAL AND/OR  
SUBSEQUENT RECORD


ORIGINAL RECORD: Set a Granite Stone, 12"x8"x6", 8" in the ground, marked M.C. on S face with 5 notches on E face;  
From Which:  
A fir, 10" in diam. bears, N25°E, 58 lks. dist. mkd. T27N R27W S32 M.C. B.T.  
A fir, 8" in diam. bears, N28°W, 47 lks. dist. mkd. T27N R27W S31 M.C. B.T.

EVIDENCE FOUND

Found Set Stone marked with MC. with Piece Broken off west side. From Which a 28" D. Fir bears N 24°E, 38.3', A 14" D. Fir bears N 25°W, 31.0'.

PERPETUATION

Re-monumented corner with 3 1/4" Alum. Cap on 3/4" x 24" Rebar. Placed MARLS Land Monument Sign and Painted Both BT's

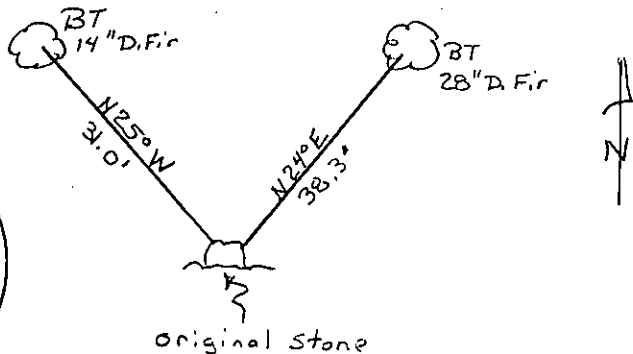

SKETCH OF CORNER

### CERTIFICATION

I, Red Cone  
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, TERRY L. DRUYVESTEIN

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-104 et seq. M.C.A.)

Signature of Surveyor & Seal

Date: 07/90 Reg. No. 2927 ES

Employer: STENSATTER DRUYVESTEIN & ASSOCIATES

Sec. 32

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 1-4-91

was noted on the cross-index plat and is assigned page No. 4384, in book No. \_\_\_\_\_

Janet B. Sugely  
County Official

Cross Index No. V-W-5 T. 27N R. 27W P.M.M.

• - corner this sheet