

CERTIFIED LAND CORNER RECORDATION
(REFERENCE FSH 5681.65)

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

Found a 1/2" iron pin in a mound of stone. The original stone not found.
Found a 30" pine; original record: 24" pine N 36°30' W 90 lks.
Found a 20" pine stump; original record: 15" pine S 44° W 94 lks.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: 4/3/68

A 12 inch pine scribed R.M. Magnetic Azimuth of 316°30', 71 feet:
Pine stump BT, Magnetic Azimuth of 303°00', 58.5 feet.
A 30 inch pine BT, Magnetic Azimuth of 202°00', 70.2 feet.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

See form R-24 Township 27 North, Range 28 West of the Principal
Meridian, Montana.

Surveyor's Seal


I, V.E. SMITH
certify that the information shown herein is true and
correct.

V. E. Smith
Signature of Ground Party Chief

I, J. T. SHAW
certify that I have carefully performed or reviewed the
work done on the diagrammed corner as reported on this
recording form and approve the same.

J. T. Shaw
Signature of Surveyor

DIAGRAM OF CORNER:

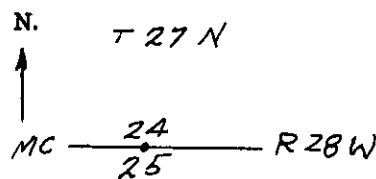

Corner recorded on the sheet

2323-5
Registration Number

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 19th. day of April 1968, was noted on the cross-index plat and is
assigned page No. 106, in book No. 1

ELEANOR L. VAUGHN, Deputy
County Official

Cross Index No. R-25 T. 27N R. 28W P. Mer.
R-1 27 27