LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 08/11/2025 Expiration Date: 08/10/2026 Permit#25-53157A

Property Owner: William and Ashley Krupa

Mailing Address: [redacted]

Installer: Donavan Truman License #: 109

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new gravity system for 3 Bedroom House.

Legal: GLEN VIEW ESTATES, S23, T36 N, R26 W, ACRES 20, PM 6371 1IN S2NW SPLIT 53116 LOT 2

Property Address: 409 Glen Creek Ln., Eureka, MT 59917 Assessment Code: 53157

DEQ COSA: E.Q.# Date:

Approved Design Criteria: Installation of new gravity system for 3 Bedroom House with 4 Laterals @ 75'.

# of Bedrooms: 3 Septic Tank Size: 1000 Trench Width: 24"

# of Laterals: 4 Length of Laterals: 75' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, Circular DEQ-4, and COSA(If Applies). It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:


This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.


WILLIAM & ASHLEY KRUPA—HOUSE SITE

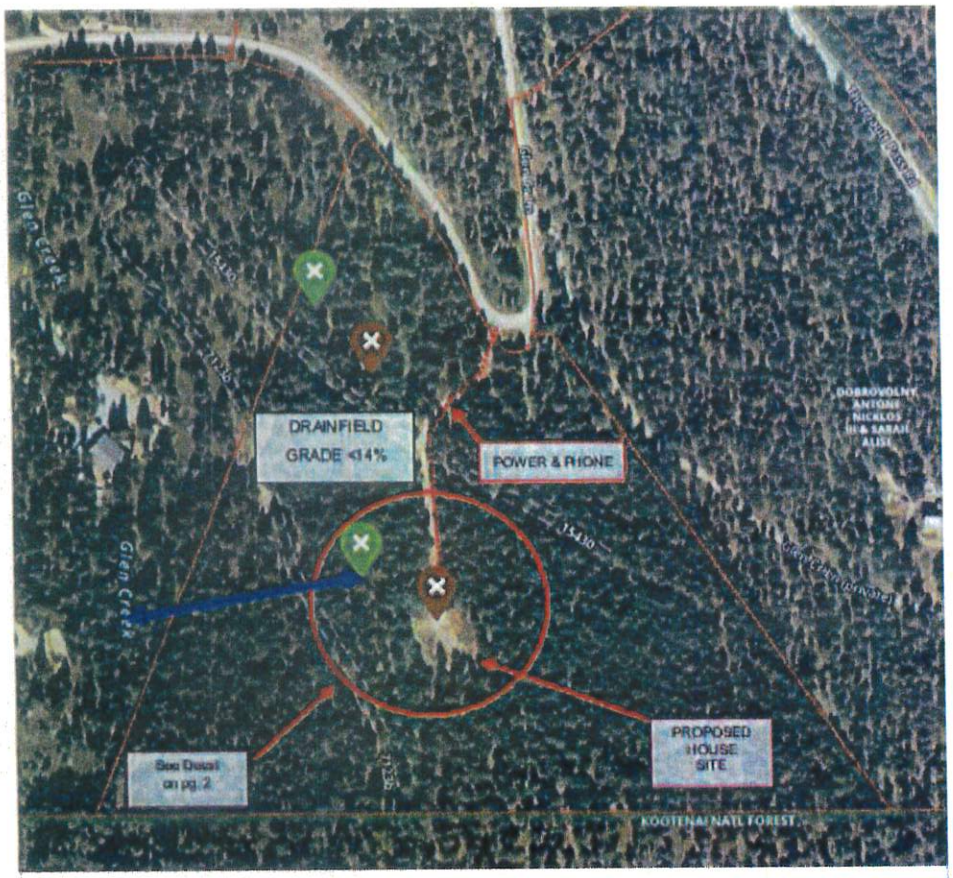

- GRAVITY SYSTEM
- 1000 GAL TANK
- D-BOX
- 4 X 75' LATERALS - 4 IN SCH 3034 PERF PIPE
- DISTANCE FROM GLEN CREEK – APPROX 395 FT

PROPOSED WELL - UNKNOWN AT TIME OF PERC TEST

WILLIAM & ASHLEY KRUPA—HOUSE SITE

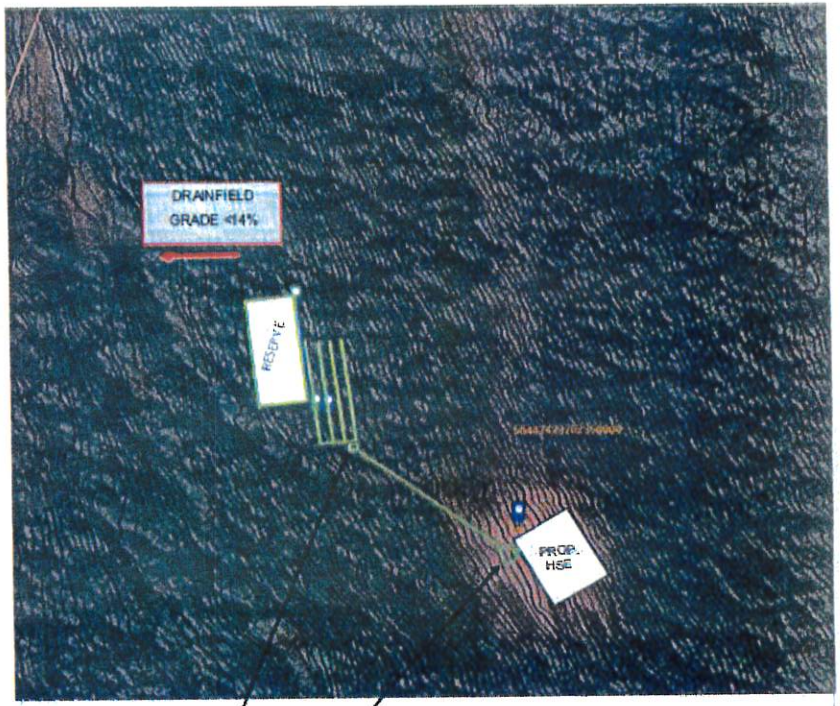

D-BOX

1000 GAL TANK
&
CLEAN OUT

PROPOSED WELL - UNKNOWN AT TIME OF PERC TEST

- GRAVITY SYSTEM
- 1000 GAL TANK
- D-BOX
- 4 X 75 LATERALS - 4 IN SCH 3034 PERF PIPE