INSTRUCTIONS

- 1. Original and/or subsequent record used to evaluate the corner
- 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated
- corners.

 3. Description of monument and accessories set to perpetuate the corner position.

 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.

 5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana, 6. Fill in Cross Index & Section Diagram at bottom of sheet.

	K 513	CERTIFIED CORNER RECORDATION					
Corner	524 524	Т.	27 N	_R. <u>28 W</u>	P.M.M	LINCOLN	County

ORIGINAL AND/OR

SUBSEQUENT RECORD ORIGINAL RECORD: Set a Lime Stone 20"x 12"x 10", 15" in the ground, marked 14 on N face;


From Which:

A pine 8" in diam. bears N22°30'E, 75 lks. dist. marked 14 5 13 B.T. A pine 10" in diam. bears S85°15'E, 13 lks. dist. marked 14 5 24 B.T.

EVIDENCE FOUND Found Original Stone . From Which original BT stump bears N220E, 48, 4'

PERPETUATION Left Stone in Place. Set a 5'Steel Fence Post at approximately 1'South of monument. Established Two RM Trees. An 9" D. Fir bears N31° E, 21.8'. A 10" D. Fir bears S46°E, 22.7' Both RM Trees tagged with MARLS Land Monument Sign and Painted Red Band around Trees.

Note: Declination used - 18° E Measurements taken to center of tree.

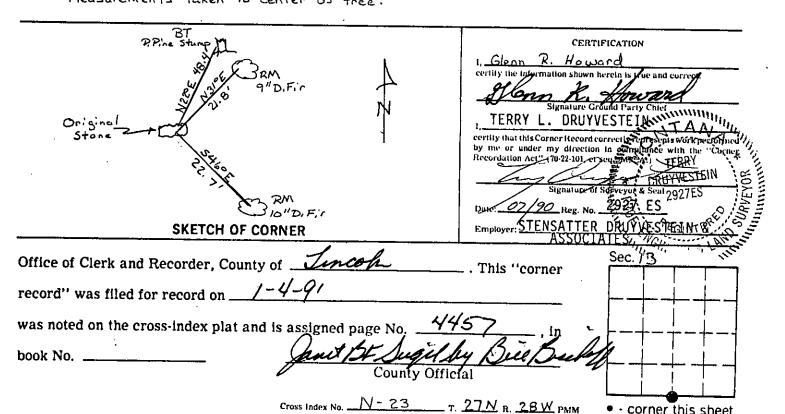

corner this sheet