

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION


Corner S 1/4 S 25 / S 30 T. 27 N R. 28 W P.M.M. LINCOLN County

ORIGINAL AND/OR
SUBSEQUENT RECORD None

EVIDENCE FOUND None


PERPETUATION Set 1 1/2" Alum. Cap on 5/8" x 24" Rebar. Set 5' Steel Fence Post approximately 1' West of monument. Established Two RM's. A 14" P. Pine bears S 31° W, 36.4'. A 4" D. Fir bears S 62° E, 14.8'. Both RM Trees Blazed, Painted and Tagged with MARLS Land Monument Sign.

Note: Declination used - 18° E
Measurements taken to center of tree

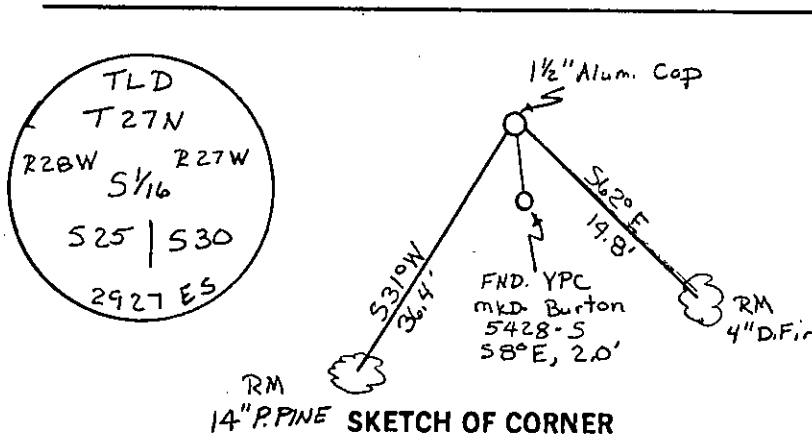

CERTIFICATION
I, GLENN R. HOWARD
certify the information shown herein is true and correct.
Glenn R. Howard
Signature of Ground Party
I, TERRY L. DRUYVESTEIN
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)
Terry L. Druyvestein
Signature of Surveyor & Seal
Date: 4-18-91 Reg. No. 2927 ES
Employer: STENSATTER DRUYVESTEIN & ASSOCIATES

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on April 22, 1991 was noted on the cross-index plat and is assigned page No. 4531, in book No. Coral M Cummings by Bill Buechler
County Official



Cross Index No. U-25 T. 27 N R. 28 W P.M.M.
U-1 27 N 27 W