LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 09/02/2025 Expiration Date: 09/01/2026 Permit#25-11634

Property Owner: Steve and Dorothy Keim

Mailing Address: [redacted]

Installer: Junior Miller License #: 52

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new pressure dosed system for 2 Bedroom House.

Legal: S15, T37 N, R28 W, COS 2390, PARCEL A, ACRES 10.14

Property Address: 819 Whitetail Dr., Rexford, MT 59930 Assessment Code: 11634

DEQ COSA: E.Q.# 25-1701 Rereview of Parcel A Date: 06/23/2025

Approved Design Criteria: Installation of new pressure dosed system for 2 Bedroom House with 2 Laterals @ 95'.

# of Bedrooms: 2 Septic Tank Size: 1000/500 Trench Width: 36"

# of Laterals: 2 Length of Laterals: 95' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, Circular DEQ-4, and COSA(If Applies). Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: Robin Blumberg, RS

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: Robin Blumberg *Date:* 9/2/25

This permit is not finalized until the system is inspected and the closure statement is signed.


This permit is not a guarantee that the system will function properly for a prescribed period of time.

Legend

- test hole
- proposed & approved drainfield site
- proposed & approved replacement area
- proposed & approved well w/100' isloation zone
- mixing zone
- proposed & existing septic tank
- Building site

Name: Re-review Parcel A of EQ#96-1507
County: Lincoln
Location- SW1/4 sec.15-T37N- R28W
E.Q.#25-1701

APPROVED
Montana Department of
Environmental Quality
Stephanie Moody BS. 6/19/2025
Reviewer Date
E.Q. # 25-1701

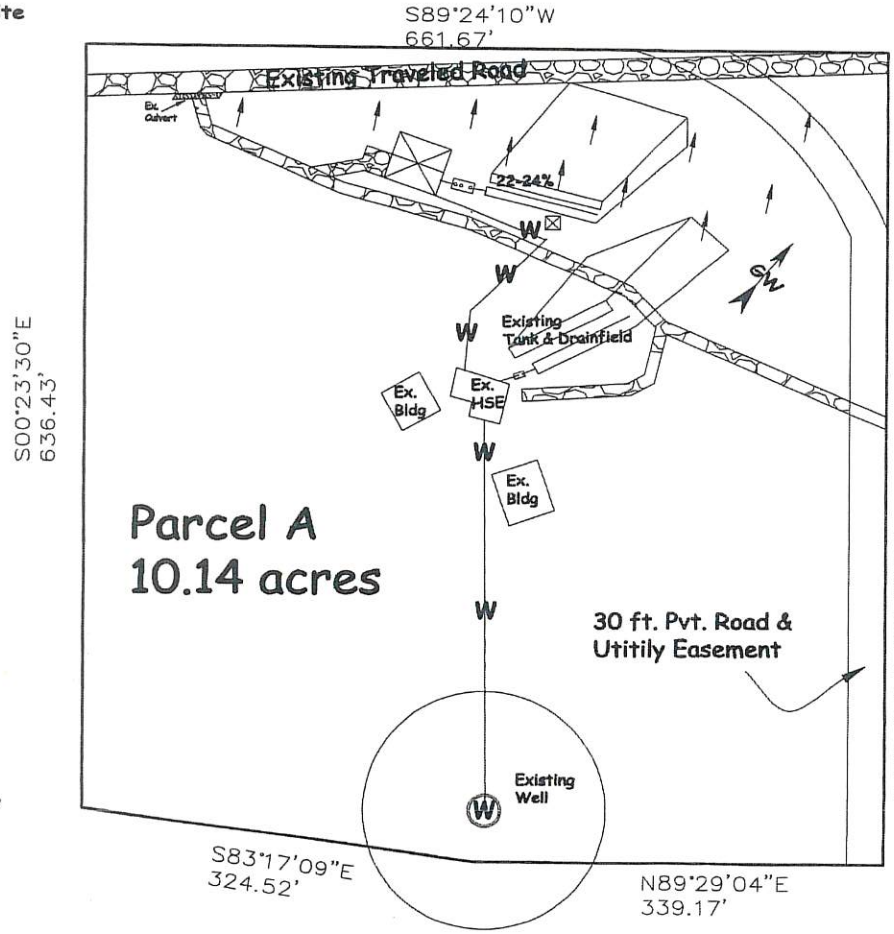

Drainfield Design Standards
for each proposed drainfield
2 bdrm. home Pressure- dosed system
0.5 gpd/ft2- application rate
186 Lin. ft. x 3' wide trenches=
2 laterals @ 93 lin. ft. & 7 ft. on center
1.000 gal. septic tank w/500 gal. pump chamber

NOTE-
1. No nearby wells or septic systems within 100 ft.
2. Drainfields exist within 500 ft. of existing well.
3. Completion of the proposed subdivision will not increase the amount of pre-development, during a 100-year, 24 hour storm event, between proposed lots and from the proposed subdivision area to the ajoining properties. 17.36.310 (3)(e)
4. Each house foundation to be one foot above natural ground surface,
5. All wells to be constructed per ARM Title 36, Chapter 21, subchapter 6.
6. 10,000 sq. ft (minimum) of landscaping per new dwelling required

Enviro-Tech
Consulting Inc.
Brian S. Launius
PO Box 5674
Kalispell, MT 59903
(406)257-2795