LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 5/30/2019 Expiration Date: 5/30/2020

Property Owner: Martin Michelsen c/o:

Address: [redacted]

Telephone: (Home) (Work)

Installer: Tony Berget License No. 26

__xx__ New Installation ____ Existing System

____ Repair ____ Replacement ____ Extension ____ Other

Describe: Two 94' laterals using drain rock and perf pipe.

Parcel Description:

Legal: S29 T31 R31

Address or Location: Murry Boundary Line Adjustment Parcel A CS 4231

Geo/Assessors code: 0000008305

Approved Design Criteria:

Bedrooms 2 Septic Tank Size: 1000 gallons Drainfield Size: 188 Linear Feet

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: Jake Mertes, R.S.

Closure Statement:

I, _____, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

Title: _____

NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-283-2442

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

MURRAY BLA


SECTION 29-T31N-R31W
LINCOLN COUNTY

NO DRAINFIELDS/WELLS/APPROVALS (100FT)
OTHER THAN SHOWN (ALL SIDES)

EQ# 14-1910
Reviewed by the Local Reviewing Authority
Under contract with the
Department of Environmental Quality/ PCD
Local Reviewer — Date 9/9/13

Accepted under contract
DEQ Representative — Date 9/16/13

Jere Johnson, R.S
Environmental Health Consulting
4572 Whitefish Stage Road
Whitefish MT 59937

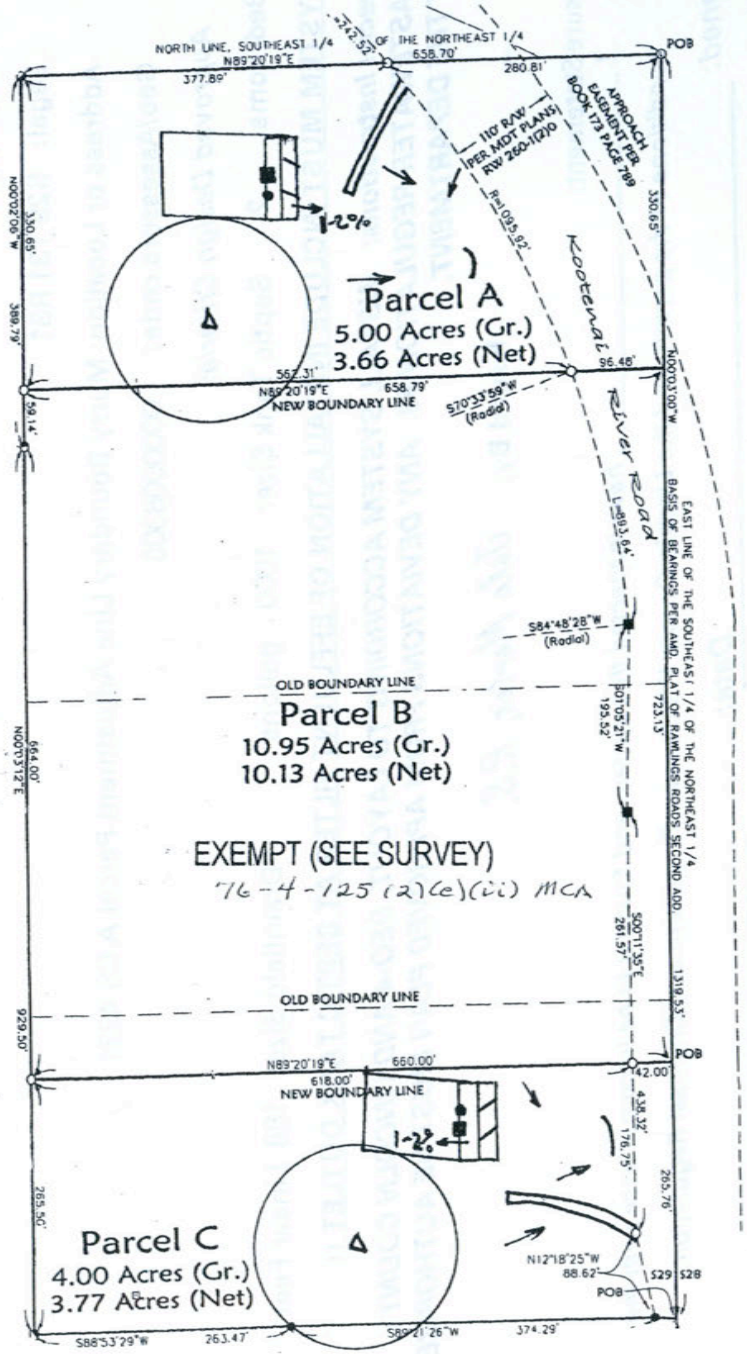

RECEIVED

SEP 12 2013

MT DEQ PUBLIC WATER
& SUBDIVISION BUREAU

LEGEND

- PRIMARY / REPLACEMENT DRAINFIELD
- Δ PROPOSED WELL
- ■ TEST HOLE
- ● PERC TEST
-) DETENTION SWALE

N

1" = 200

PARCEL A & C
38 ft X 3ft X 1ft retention/detention basin below bui
in natural topographical low, and 3ft wide X 1ft dee
with 3:1 slopes ditch along both sides of driveway.

NOTE:
ALL STORMWATER SHALL BE RETAINED ON THE PROPERTY.
DRIVEWAY AND BUILDING CONSTRUCTION MUST BE COMPLI
SUCH THAT RUNOFF WILL NOT FLOW OFF PROPERTY.

OWNER OF THE PROPERTY IS THE RESPONSIBLE ENTITY
FOR THE MAINTENANCE OF THE STORMWATER STRUCTURE

DRAINFIELD SIZING:
DEQ = 0.6gpdpsf
300/0.6 = 500sf
500sf/2 = 250lf/3 = 3-83ft laterals
Proposed: 3-83ft laterals, 7ft centers, 3ft trench