

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner NE COR Sec. 27 T. 27N R. 29W P.M.M. Lincoln County

## GLO - 1902 - Burton Adams and William Weeks

Set a limestone 18x10x6 inches, 12 inches in the ground for corner of Sections 22, 23, 26, and 27 marked with 2 notches on south and 2 notches on east edges; from which:

- A pine, 4 inches diameter, bears N23°E, 28 links (18.48 feet) distant, marked T27N R29W S23 BT.
- A pine, 3 inches diameter, bears S42°15'E, 29 links (19.14 feet) distant, marked T27N R29W S26 BT.
- A pine, 3 inches diameter, bears S29°15'W, 13 links (8.58 feet) distant, marked T27N R29W S27 BT.
- A pine, 4 inches diameter, bears N46°W, 26 links (17.16 feet) distant, marked T27N R29W S22 BT.

## BLM - 1966

The corner of Sections 22, 23, 26, and 27 monumented with a limestone 18x12x4 inches diameter, firmly set, marked with 2 notches on the south and 2 notches on the east edges.

At corner point, set an iron post, 30 inches long, 2½ inches diameter, 24 inches in the ground, with brass cap marked as shown below; from which:

- A pine, 5 inches diameter, bears N42°E, 36 links (23.76 feet) distant, marked T27N R29W S23 BT.
- A pine, 12 inches diameter, bears S37°E, 69 links (45.54 feet) distant, marked T27N R29W S26 BT.
- A pine, 8 inches diameter, bears S36°W, 72 links (47.52 feet) distant, marked T27N R29W S27 BT.
- A pine, 8 inches diameter, bears N73°W, 64 links (42.24 feet) distant, marked T27N R29W S22 BT.

Bury original stone alongside the iron post.

## FOUND:



Found a 3¼" BLM brass cap, marked as shown below, 0.4' above ground; from which:

- A 4 inch pine snag with visible scribing and bearing tree tag, bears S57¾°W, 29.86 feet distant.
- An 8" lodge pole pine with visible scribing and bearing tree tag, bears N75°W, 41.18 feet distant.
- A 9" lodge pole pine with visible scribing and bearing tree tag, bears S41½°E, 23.24 feet distant.
- An 11" larch with visible scribing and bearing tree tag, bears S27¾°E, 39.84 feet distant.
- A 9" pine with visible scribing lying on ground bears southeast.

## ESTABLISH:

Established one new accessory for this corner:

- A 7 inch lodge pole pine bears S41½°W, 10.27 feet distant, blaze and scribe "T27N R29W S27 BT".

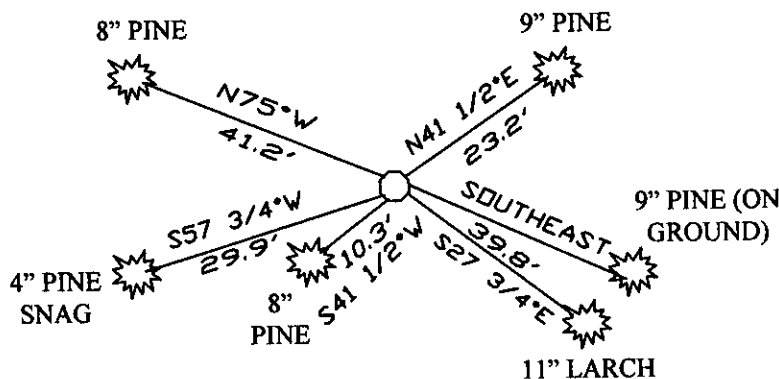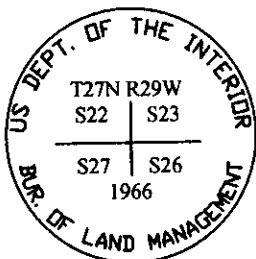

SKETCH OF CORNER

## CERTIFICATION

I, Stephen Jeske

Certify the information shown herein is true and correct.

Stephen Jeske  
Signature Ground Party Chief

I, Stephen Jeske

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22101, et seq., M.C.A.)

Stephen Jeske  
Signature of Surveyor & Seal

Date: 7-15-2008

Reg. No. 14230

Employer: J.R.S. Surveying, Inc.

Office of Clerk and Recorder, County of Lincoln

record" was filed for record on 07/28/2008

was noted on the cross-index plat and is a

book no. 213159

This "corner  
213159 BOOK: CCR CC&R'S PAGE: 11261 Pages: 1

STATE OF MONTANA LINCOLN COUNTY

RECORDED: 07/28/2008 12:40 KOI: CC&R'S

TAMMY D. LAUER CLERK AND RECORDER

FEE: \$0.00

TO: J.R.S. SURVEYING P.O. BOX 1050, LIBBY, MONTANA 59923

County Official

Cross Index No. R17 T. 27N R. 29W PMM

Adopted July 1, 1981, Montana Board of Professional Engineers & Land Surveyors

• - Corner this sheet