LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 9/1/2017 Expiration Date: 9/1/2018

Property Owner: Ryan Cooper c/o: Darwin Pluid

Address: [redacted]

Telephone: (Home) (Work)

Installer: Darwin Pluid License No. 164

__xx__ New Installation ____ Existing System

____ Repair ____ Replacement ____ Extension ____ Other

Describe: Three 65' laterals using gravelless chambers.

Parcel Description:

Legal: S9 T36 R27

Address or Location: Big Sky Meadows Unit 4 Lot 2

Geo/Assessors code: 0000014782

Approved Design Criteria:

Bedrooms 3 Septic Tank Size: 1000 gallon Drainfield Size: 195 Linear Feet

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: Jake Mertes, R.S.

Closure Statement:

I, Darwin Pluid, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: Darwin Pluid Date: 10/26/17

Title: Earth Works Owner Lisc. # 164

NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.


406-283-2442

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

Big Sky Meadows UNIT #4

water & sewer plan
8-15-96
Lincoln County

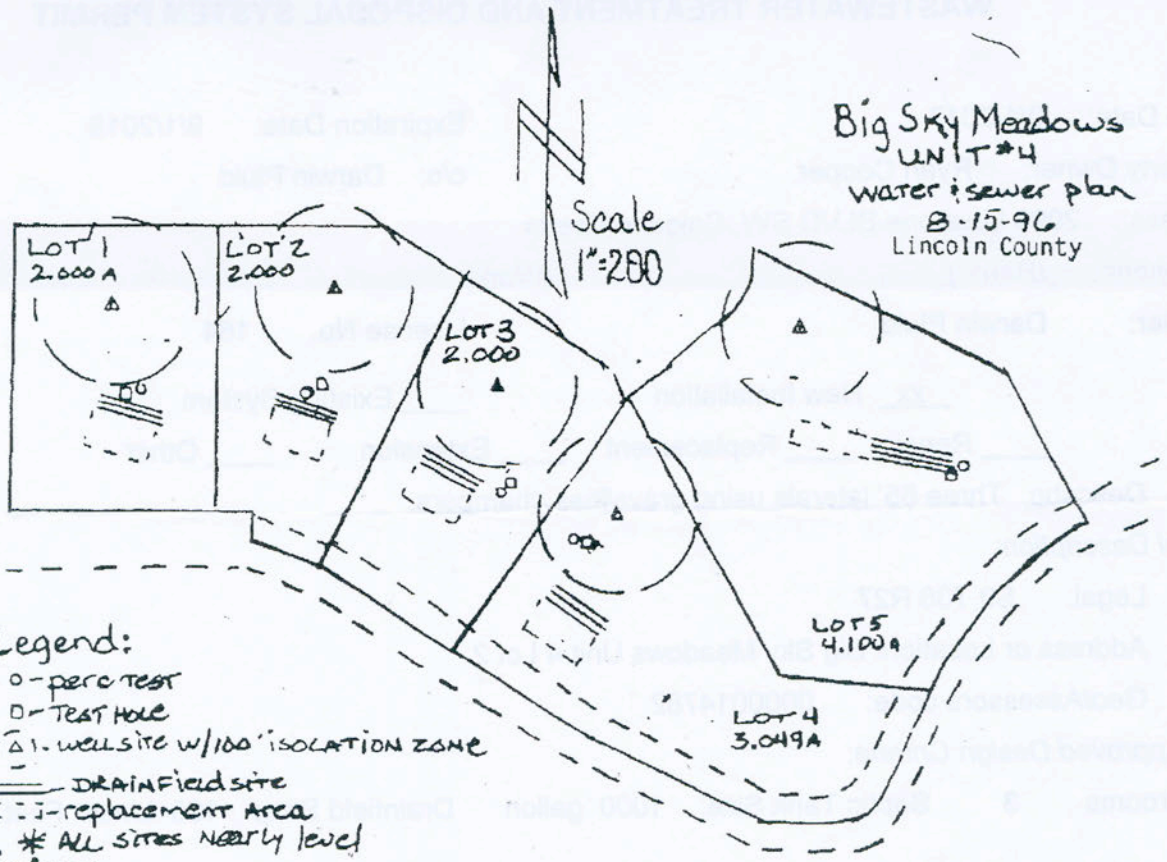

Legend:

- o - perc test
- D - TEST HOLE
- (Δ) - well site w/100' isolation zone
- ═══ - DRAINFIELD SITE
- [:] - replacement area
- * ALL SITES NEARLY level

Soils:

LOT 1
0-8" - TOP SOIL
8-40" - SANDY LOAM
40-96" - gravelly SAND

LOT 2 & 3
0-8" - TOP SOIL
8-40" - gravel 2½ minus
40-96" - SANDY gravel

LOT 4
0-15" - SANDY LOAM
15"-40" - SANDY GRAVEL
40-96" - gravelly SAND

LOT 5
0-6" - TOP SOIL
6-96" - FINE PACKED SAND

No evidence of groundwater or bedrock. Estimated depth to ground-water is greater than 7 feet,
NO EXISTING WELLS OR SEPTIC SYSTEMS WITHIN 100' of boundaries

Perc Rates

LOT 1 - 4 MIN/INCH
LOT 2 & 3 - 1.75 MIN/INCH
MAY required SAND lined TRENCHES
LOT 5 - 20 MIN/INCH

Lot 4 = 5 min/in

APPROVED
Water Quality Division
Montana Department of
Environmental Quality

Project Officer. 10-10-96
Date

DEPT. OF [illegible] CITY