

- INSTRUCTIONS**
1. Original and/or subsequent record used to evaluate the corner position.
 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 3. Description of monument and accessories set to perpetuate the corner position.
 4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography lines, position of accessories, etc.
 5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner $\frac{1}{4}$ secs. 25 and 26 T. 27N R. 29W P.M.M. Lincoln County

Record 1902

Set a limestone, 15x12x6 ins. 10 ins. in the ground, for $\frac{1}{4}$ sec. cor. marked $\frac{1}{4}$ on W. face; From which:

A tamarack, 15" dia. bears N22° E, 15 lks. dist. marked $\frac{1}{4}$ S25 BT
A fir, 18" dia. bears S49° W, 53 lks. dist. marked $\frac{1}{4}$ S26 BT

FOUND


15"x12"x6" Stone with $\frac{1}{4}$ on West face, well set; from which two original BTs, A fir stump S50° W 10.53' scribed $\frac{1}{4}$ S26 BT.
A 12" tamarack blown down 35.0' scribed $\frac{1}{4}$ S25 BT.

SET

Set a standard Forest Service 3 $\frac{1}{2}$ " aluminum cap on a aluminum pipe at the exact center of the base of the corner stone, which is now buried along the South side of the new monument; from which

New bearing trees

A 16" tamarack bears S71° W 33.5' blazed and scribed $\frac{1}{4}$ S26 BT.
A 8" white fir bears S86° E 15.1' blazed and scribed $\frac{1}{4}$ S25 BT.
Painted red bands around BTs and attached required signs to BTs.
A U.S.D.A. steel post bears South 3'

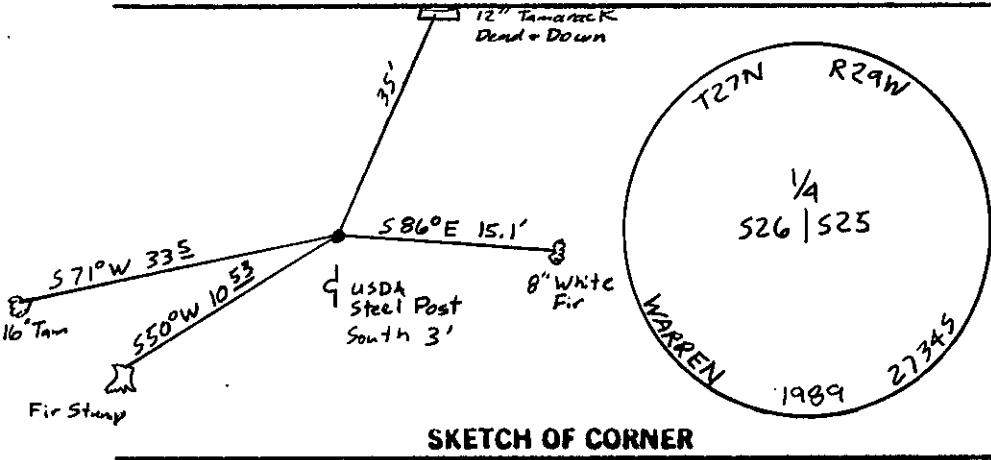

| | |
|---|--|
| CERTIFICATE | |
| I, <u>Dan Croft</u> , certify the information shown herein is true and correct. <u>H. Gene Warren</u> certifying that this Corner Record correctly represents what was established by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.D.A.) <u>H. Gene Warren</u> Signature of Surveyor & Seal Date: <u>6/27/89</u> Reg. No. <u>2734S</u> Employer: <u>Rocky Mt. Surveyors</u> | |

Office of Clerk and Recorder, County of Lincoln This "corner
 record" was filed for record on the July 3 day of 1989
 was noted on the cross-index plat and is assigned page No. 4065, in
 book No. _____

Janet BF Sigil by Bill Buckley
 County Official D.P.

