

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner East 1/4 Section 9 only T. 27N R. 29W P.M.M. Lincoln County

Record 1902

A Fir 10 ins. diam. for 1/4 sec. cor., I marked 1/4 S 10 on east and 1/4 S 9 on west, from which:

- A fir 8 ins. diam. bears S 43 43 E 13 lks. marked 1/4 S10 BT
- A fir 8 ins. diam. bears N 83 1/2 W 41 lks. marked 1/4 S 9 BT

B.L.M. 1966

- A fir 14 ins. diam. with visible marks 1/4 S 9 on west face, and witnessed by one original BTs.
- A dead fir 10 ins. diam. bears S 43 1/2 E 13 lks. marked 1/4 S 10 BT

The new bearing trees

- A fir 16 ins. diam. bears S 76 W 57 lks. marked 1/4 S 9 BT
- A spruce 10 ins. diam. bears N 76 W 74 lks. marked 1/4 S 9 BT

Found


- A 16 inch fir with 1/4 S 9 on west face (alive), from which:
Rotten remains with visible scribing N 78 W 48.80 feet
- A 20 inch fir S 77 W 37.00 feet, from face of corner tree, scribe overgrown.

New bearing tree:

- A 14 inch hemlock N 40 W 19.60 feet, from face of corner tree, scribed 1/4 S 9 BT.
- Maintained other BT with required signs and paint, and set U.S.D.A. steel post 3 feet north of corner tree.

Survey Note

Corner refers to section 9 only because of resurvey in 1911, that closed south of southeast corner of section 9. The 1/4 corner of section 10 was never set.

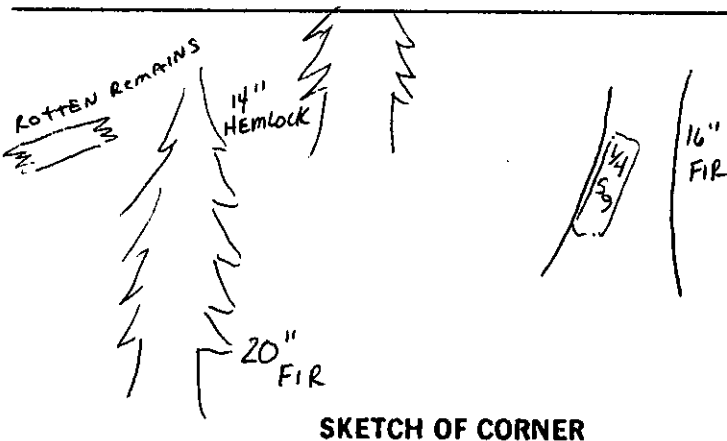

CERTIFICATION

I, Dan Croft
certify the information shown herein is true and correct.

Dan Croft
Signature of Party Chief

I, Gene Warten
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-10), et seq., M.D.A.

Gene Warten
Signature of Registered Surveyor & Seal

Date: 8/11/89

Employer: Rocky Mountain Surveyors

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Aug 16 day of 1989 was noted on the cross-index plat and is assigned page No. 4067, in book No. _____

Janet B. Sigel by Bill Sigel
County Official

