

- INSTRUCTIONS
1. Original and subsequent record used to evaluate the corner position.
 2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
 3. Description of monument and accessories set to perpetuate the corner position.
 4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
 5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
 6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner South East Section 9 T. 27N R. 29W P.M.M. Lincoln County

Record 1902

Set a limestone 18x10x6 ins., 12 ins. the ground, for the cor. of sections 9, 10, 15, and 16 marked with 4 notches on south, and 3 notches on east, from which,

A Fir 10 ins. diam. bears N 20½ E 25 lks. marked T27N R29W S 10
B T
A Fir 18 ins. diam. bears S 30½ E 25 lks. marked T27N R29W S 15
B T
A Fir 8 ins. diam. bears S 29 45 W 91 lks. marked T27N R29W S 16
B T
A Fir 6 ins. diam. bears N 35 45 W 15 lks. marked T27N R29W S 9
B T

Remonumentation B.L.M. 1966

Set a iron post 30 ins. long, 2½ ins. diam., 24 ins. in the ground from which;

The original bearing trees;

A Fir 10 ins. bears S 29½ W 91 lks. mark overgrown. (record)
A Fir snag 8 ins bears N 35½ W 15 lks. marked T27n R29W S 9 BT (record)

The new bearing tree;


A Fir 8 ins. bears N 70 W 62 lks. marked T27N R29W S 9 BT

Buried original stone along side the iron post

Found

3½ inch B.L.M. brass cap, from which;

A 14 ins. Fir S 28½ W 59.75 feet with scribe overgrown
A 8 inch Fir N 36 W 10.23 feet marked T27N R29W S9 BT
A 9 inch Fir N 72 W 39.20 feet with scribe overgrown
Maintained BTs with signs and paint. Set a U.S.D.A. steel post 3 feet north.

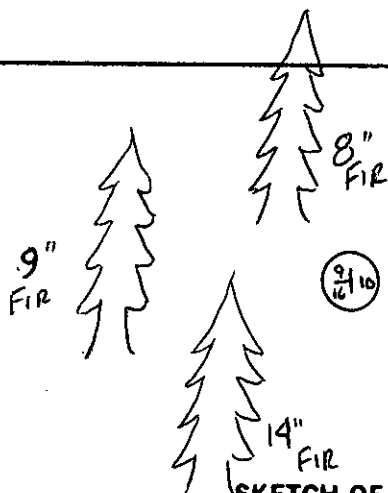

SKETCH OF CORNER

CERTIFICATION

I, Dan Croft
certify the information shown herein is true and correct.

I, GENE WARREN
certify that this corner record correctly represents work performed by me or under my supervision in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)


Date: 8-11-80 27N 29W

Employer: ROCKY MOUNTAIN SURVEYORS

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Aug 16 day of 1980 was noted on the cross-index plat and is assigned page No. 4068, in book No. _____

Cross Index No. J-13 T. 27N R. 29W P.M.M.

Sec. 9



• - corner this sheet