

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Northwest Section 10 T. 27N R. 29W P.M.M. Lincoln County

Record 1902

Set a limestone 15x12x6 ins. 10 ins. into the ground for corner of sections 3, 4, 9 and 10 marked with 5 notches on south, and 3 notches on east edges, from which;

A Fir 6 ins. diam. bears N 54½ E 24 lks. marked T27N R29W S3 BT

A Fir 4 ins. diam. bears S 50 15 E 20 lks. marked T27N R29W S10 BT

A Fir 14 ins. diam. bears S 67½ W 33 lks. marked T27N R29W S9 BT

A Fir 4 ins. diam. bears N 32 45 W 12 lks. marked T27N R29W S4 BT.

Remonumentation B.L.M. 1964

Set a iron post 30 ins. long, 2½ ins. diam., 24ins. into the ground and in a mound of stone 4ft. in diam., with brass cap.
From which:

The original bearing trees:

A fir 6 ins. diam. bears N 54½ E 24 lks. scribe overgrown

A fir 5 ins. diam. bears S 50½ E 20 lks. scribe overgrown

A fir 20 ins. diam. bears S 67½ W 33 lks. marked T27N R29W S9 BT

A fir 6 ins. diam. bears N 32 45 W 12 lks. scribe overgrown

Buried original stone alongside iron post.

Found

3½ inch B.L.M. brass cap leaning down hill and very loose, reset monument, from which:

A 7 inch fir S 56 E 12.70 feet marked T27N R29W S10 BT

A 8 inch fir N 59 E 15.90 scribe overgrown


A 13 inch fir N 34 W 7.73 feet scribe overgrown

A dead 20 inch fir S 69 W 21.80 feet marked T27N R29W S9 BT

New bearing tree

A 6 inch fir bears S 83 W 70.20 feet marked T27N R29W S9 BT

Maintained original BTs with required signs and paint, added rock to collar of stone.

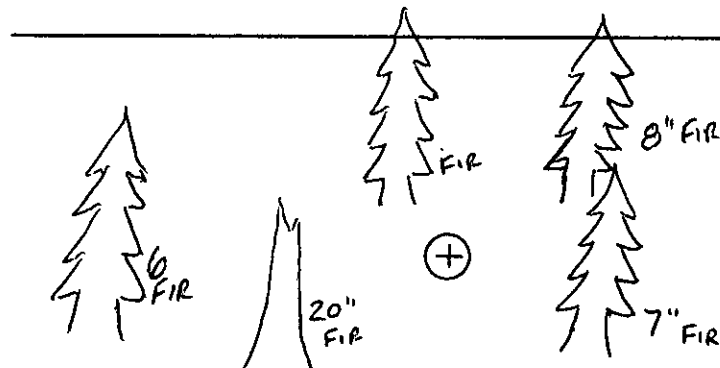

SKETCH OF CORNER

CERTIFICATION

I, Dan Croft

certify the information shown herein is true and correct.

Dan Croft
Signature of Registered Land Surveyor

I, Gene Warren

certify that this corner record correctly represents work performed by me or under my supervision in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Gene Warren
Signature of Registered Land Surveyor


Date: 8/17/89

Employer: Rocky Mountain Surveyors

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the Aug 16 day of 1989 was noted on the cross-index plat and is assigned page No. 4069, in book No.

Cross Index No. E-13 T. 27N R. 29W P.M.M.

Sec. 10

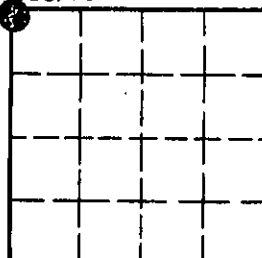

• corner this sheet