LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 09/09/2025 Expiration Date: 09/08/2026 Permit#25-56141

Property Owner: Karen Wisher

Mailing Address: [redacted]

Installer: Brett Bennett License #: 207

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new Level 2 pressure dosed system for 1 Bedroom House.

Legal: PARKSIDE @ FISHER RIVER, S14, T27 N, R28 W, LOT 29, ACRES 5.144, PM 6892

Property Address: 532 Rogers Mountain Loop, Libby, MT 59923 Assessment Code: 56141

DEQ COSA: E.Q.# 26-1031 Parkside @ Fisher River Rewrite Lot 28&29 Date: 8/21/25

Approved Design Criteria: Installation of new Level 2 pressure dosed system for 1 Bedroom House with Advantex AX-20 Filter Pod, 1000/500 AX recirculating tank, 1000 gallon dose tank and 18" trench depth with 2 Laterals @ 100'. O & M for Level 2 is required in perpetuity with Advantex authorized dealer/representative.

# of Bedrooms: 1	Septic Tank Size: 1000/500 +1000	Trench Width: 36"
# of Laterals: 2	Length of Laterals: 100'	Trench Depth: 18"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, Circular DEQ-4, and COSA(If Applies). It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

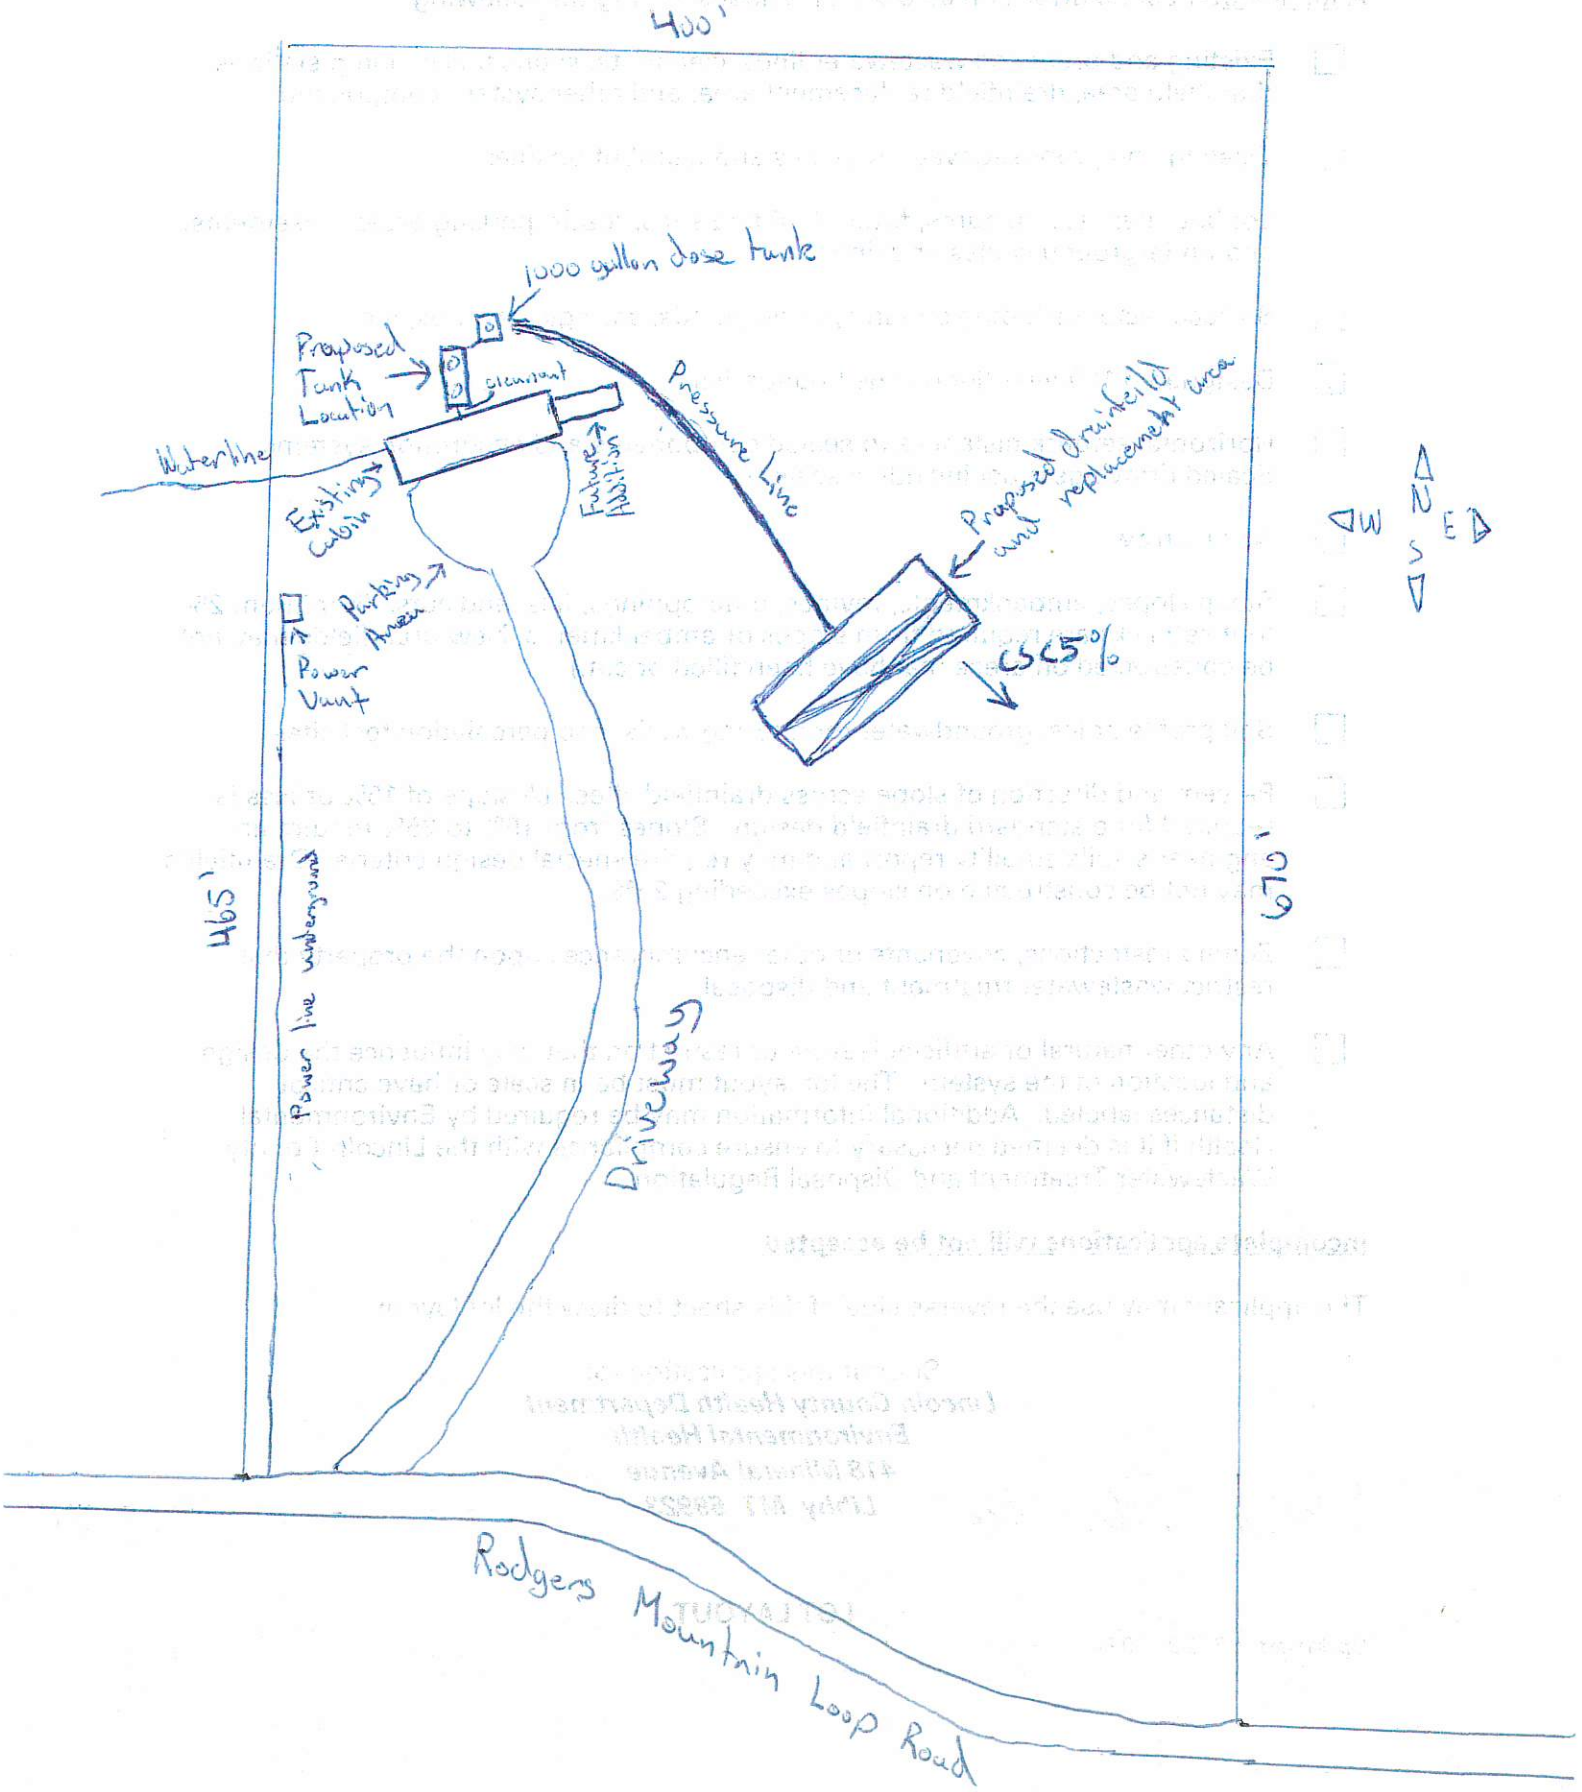
Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: Robin Blumberg *Date:* 11/20/25

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.


400'
1000 gallon dose tank
Proposed Tank Location
Pressure Line
Proposed drainfield and replacement area
Waterline
Existing Cabin
Future Addition
Parking Area
Power Vault
<5%
N
E
S
W
465'
670'
Power line underground
Driveway
Rodgers Mountain Loop Road