

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner 1/4 Cor. of Secs. 12 & 13 T. 27 N. R. 30 W. P.M.M. Lincoln County

- I. 1900 G.L.O. record by Burton S. Adams: Set a granite stone, 14x9x8 ins., 9 ins. in the ground, for 1/4 sec. cor., marked 1/4 on the north face; raise a mound of stone 2 ft. base, 1 1/2 ft. high N. of cor. Pits impracticable. No suitable bearing trees within limits.

1976 Land Corner Record by J. H. Ninneman: Found pipe by others.

1981 U. S. F. S. Land Corner Record by T. C. Hill: Found a 1 in. steel pipe with plastic cap marked J. H. N. 4661 S, mound of stone and a location poster on a Doug fir 12 ins. diam., bears N 52° W, 2.5 ft. dist. From which:

The new bearing trees

A Doug fir 12 ins. diam., bears N 39° E, 11.6 ft. dist. mkd. 1/4 S 12 BT.

A Doug fir 10 ins. diam., bears S 12° E, 14.7 ft. dist. mkd. 1/4 S 13 BT.

- II. Found a 1 1/2 in. diam. steel pipe with yellow cap mkd. 4661 S inserted inside pipe with scattered stones nearby, from which:

A fir 15 ins. diam., bears N 39° E, 11.5 ft. dist., pitched face. (Hill 1981)


A fir 13 ins. diam., bears N 48° W, 2.6 ft. dist., X in a snowblaze, healed face. (no record)

A fir 14 ins. diam., bears S 22° E, 14.6 ft. dist., healed face. (no record)

A fir 12 ins. diam., bears S 12° E, 14.7 ft. dist., pitched face. (Hill 1981)

No evidence of original stone.


- III. At the position of the found steel pipe, I set a 2 1/2 ins. diam. X 30 ins. long aluminum pipe, 22 ins. in the ground with a 3 1/4 ins. diam. aluminum cap marked as shown below. Buried the steel pipe inside the aluminum pipe. Raise a collar of stone around the aluminum pipe.



Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, South, 3 ft.

Magnetic Declination: 20° East

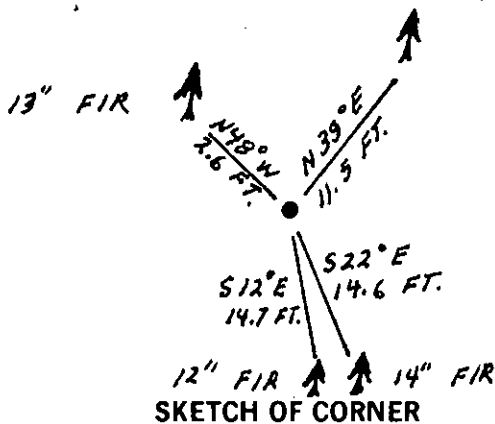

SKETCH OF CORNER

## CERTIFICATION

I, Kenneth R. Kern  
certify the information shown hereon is true and correct.

Kenneth R. Kern  
Signature Ground Party Chief

I, Alvah F. Hughes  
certify that this Corner Record correctly represents the corner as shown by me or under my direction in compliance with the Corner  
Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah F. Hughes  
Signature of Surveyor & Seal


Date: 12/7/92 Reg. No. 7322 LS

Employer: U. S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner  
record" was filed for record on 12-14-92  
was noted on the cross-index plat and is assigned page No. 5142, in  
book No. Coral M. Cummings by BB

County Official

J-23 27 N 30 W  
Cross Index No. T. R. PMM



• - corner this sheet