

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner NE Sec. Cor S12 T. 27 N. R. 30 W. P.M.M. Lincoln County

- I. 1900 G.L.O. record by Burton S. Adams: A fir tree, 24 ins. diam., for cor. of secs. 1, 6, 7 and 12.
Four bearing trees.


1902 Frac. Subdivision and Retracement of the Frac. W. Bdry. of T27N R29W, by Burton S. Adams & W. C. Weeks:
Intersect the west boundary of T27N R29W, 105 lks. N. of the cor. of secs. 1, 6, 7 & 12, which is a fir, 26 ins. diam., marked and witnessed by the surveyor general. As it will hereafter refer to secs. 1 & 12 only, I efface the marks from the N.E. and S.E. sides and also from the N.E. and S.E. bearing trees.

1971 BLM Remonumentation by Roy G. Leedy: The cor. of secs. 1 and 12, on the E. bndry. of the Tp.,
monumented with a decomposed fir stump with no visible marks, from which the remains of one of the original bearing trees:

A stump hole, bears S 54° W, 63 lks. dist., with a fallen log, mkd. W S12, lying alongside.

At the corner point

Set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with brass cap mkd.



from which the new bearing trees:

- A pine, 6 ins. diam., bears S 60° W, 28 lks. dist., mkd. T27N R30W S12 BT.
A pine, 6 ins. diam., bears N 49° W, 53 lks. dist., mkd. T27N R30W S1 BT.

- II. Found a 2 1/2 in. diam. iron pipe, 1 in. out of a mound of stone, with a 3 1/4 in diam. BLM brass cap mkd. as shown above, from which:

- A fallen fir, bears S 54° W, 41.0 ft. dist. (62 lks.), mkd. R30W S12.
A fallen pine, 10 ins. diam., bears S 60° W, 18.3 ft. dist. (28 lks.), mkd. with visible scribe.
A pine snag, 9 ins. diam., bears N 49° W, 35.1 ft. dist. (53 lks.), mkd. T27N R30W S1 BT.
A depression, bears N 89° W, 32 ft. dist. (48 lks.).


- III. Established two new bearing trees

- A fir, 7 ins. diam., bears S 26° W, 15.3 ft. dist., mkd. T27N R30W S12 BT.
A fir, 8 ins. diam., bears N 57° W, 17.6 ft. dist., mkd. T27N R30W S1 BT.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Set a 6 ft. galv. steel post with Land Survey Marker and Property Boundary Decals, North, 3 ft.

Magnetic Declination: 20° East

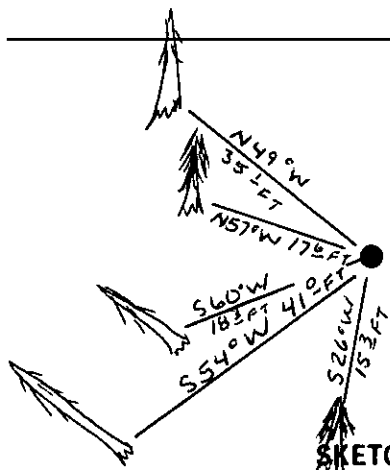

SKETCH OF CORNER


CERTIFICATION	
1. Kevin A. Todd	certify the information shown herein is true and correct
<i>Kevin A. Todd</i>	Signature Ground Boundary Surveyor
1. Ronald A. Pearson	certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101 et seq., M.C.A.)
<i>Ronald A. Pearson</i>	Signature of Surveyor & Seal
Date: 10/27/92	Reg. No. 9008 LS
Employer: U.S. FOREST SERVICE	

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Jan 11, 1993 was noted on the cross-index plat and is assigned page No. 5218, in book No. Coral M. Cunningham, J.B.

County Official

Cross Index No. E-25 T. 27 N R. 30 W P.M.M.

Sec. 12



• corner this sheet