LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 02/05/2013 Expiration Date: 02/06/2014

Property Owner: Kathy Jenkins c/o:

Address: [redacted]

Telephone: (Home) [redacted] (Work)

Installer: License No.

__XX__ New Installation _____ Existing System

_____ Repair _____ Replacement _____ Extension _____ Other

Describe: Installing system for 3rd residence on property. Sand-lined drainfield required per attached detail.

Parcel Description:

Legal: S25 T37 R27 Tract 8 of COS #2136

Address or Location: 4101 Highway 93 North

Approved Design Criteria:

Bedrooms: 3 Septic Tank Size: 1000 allons Drainfield Size: 195 Linear Feet

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SAND-LINED SYSTEM ACCORDING TO LAYOUT, DETAIL DRAWING, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: *Kendra J. Lind, R.S.*

Closure Statement:

I, _____, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

Title: _____

NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

406-283-2442


DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

JENKINS PROPERTY

SW4 SECTION 25-T37N-R27W
LINCOLN COUNTY

DRAINFIELD SIZING: 3 BEDROOM
DEQ=0.8gpdpsf
300/0.8 = 375sf
375sf/2 = 188lf /3 = 3-65ft laterals
Proposed: 3-65ft laterals , 7ft centers, 3ft trench depth
SAND-LINED TRENCHES

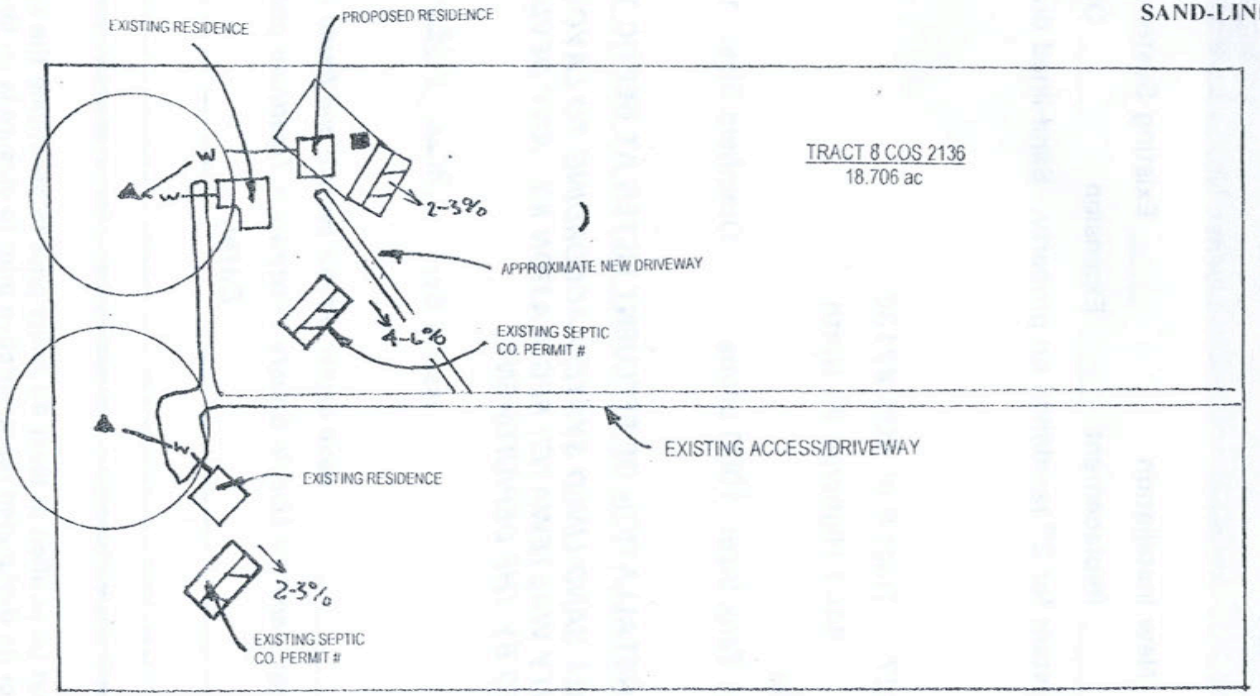

LEGEND

PRIMARY / REPLACEMENT DRAINFIELD

EXISTING WELL

TEST HOLE

DETENTION SWALE

N

1" = 200'

Jere Johnson, R.S
Environmental Health Consulting
4572 Whitefish Stage Road
Whitefish MT 59937