


CERTIFIED CORNER RECORDATION

Corner Sec. Cor. Secs. 13,14,23,24 T. 28N R. 27 1/2W P.M., MT Lincoln County

- I. 1902 G.L.O. Record by Burton S. Adams et.al.: Set a limestone, 18x10x8 ins., 12 ins. in the ground for the cor. of secs. 13,14,23,24, mkd. with 3 notches on S. and 1 notch on E. edges. Established four bearing trees:
1978 B.L.M. Remonumentation by Larry A. Christiansen: The cor. of secs. 13,14,23,24, monumented with a limestone, 18x10x8 ins., firmly set, 12 ins. in the ground, mkd. as described in the surveyor general and witnessed by the original bearing trees. At the corner point, set an iron post, 30 ins. long, 2 1/2 ins. diam., 22 ins. in the ground, with brass cap mkd. as shown.

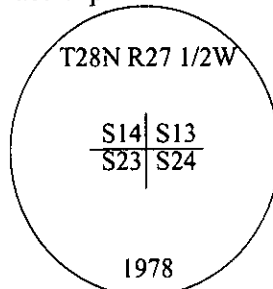


Bury the original stone alongside and raise a flat mound of stone, 3.0 ft. diam., around the iron post.
1992 Certified Corner Recordation by Ronald A. Pearson, 9008LS: Found a 2 1/2 in. diam. iron pipe, protruding 12 ins. above the ground, with rock collar, mkd. as shown and witnessed by the original bearing trees. Established three new bearing trees and set one steel guard post.

- II. Found a 2 1/2 in. diam. iron pipe, firmly set, protruding 16 ins. above the ground, with a mound of stone to top, with a 3 1/4 in. diam. brass cap, mkd. as shown.
 from which:

A larch, 13 ins. diam., bears N40°E, 25.9 ft. dist., with a healed face. (GLO-record)
 A larch, 13 ins. diam., bears S28°E, 32.9 ft. dist., with visible scribe. (1992-record)
 A pine stump, 9 ins. diam., bears S39°E, 18.6 ft. dist., with scribed log alongside. (GLO-record)
 A fir, 11 ins. diam., bears S32°W, 6.1 ft. dist., with visible scribe. (1992-record)
 A downed pine, 11 ins. diam., bears S62°W, 28.4 ft. dist., with visible scribe. (GLO-record)
 A downed fir, 16 ins. diam., bears N22°W, 22.0 ft. dist., with visible scribe. (1992-record)
 A downed pine, 14 ins. diam., bears N66°W, 13.2 ft. dist., with scribe face down. (GLO-record)
 Two steel guard posts, West, 4.0 ft., East, 2.0 ft., with LSM and PB decals attached.

- III. Established two new bearing trees:
 A larch, 10 ins. diam., bears S43°E, 40.5 ft. dist., mkd. "T28N R27 1/2W S24 BT".
 A larch, 9 ins. diam., bears N65°W, 6.0 ft. dist., mkd. "T28N R27 1/2W S14 BT".
 I deface the Property Boundary decal on guard post West, 4.0 ft. W. of corner.
 Move guard post with Property Boundary decal from East, 2.0 ft. to North, 2.0 ft. of monument.
 Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East

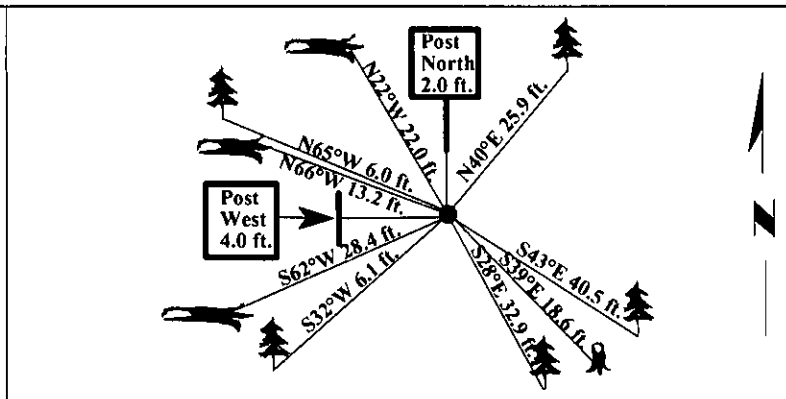

SKETCH OF CORNER

CERTIFICATION	
I. <u>Rex O. Rice</u>	certify the information shown herein is true and correct.
<u>Rex O. Rice</u>	
I. <u>Steven A. Boyer</u>	certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)
<u>Steven A. Boyer</u>	
Date: <u>6/16/98</u>	Signature of Surveyor & Seal
Reg. No.: <u>9750LS</u>	
Employer: <u>U.S. FOREST SERVICE</u>	

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 8-19-98 and was noted on the cross-index plat and is assigned page No. 10201 in book No. _____

Coral M. Cummings B. J. B.
 County Official

Sec. 24

• - corner this sheet