

CERTIFIED CORNER RECORDATION


Corner **C.C.** **Secs.** 13 & 24 **T.** 28N **R.** 27 1/2W **P.M., MT** **Lincoln** **County**

I. 1902 G.L.O. Record by Burton S. Adams et. al.: Set a limestone, 20x12x10 ins., 15 ins. in the ground, for closing corner of secs. 13 and 24, mkd. "C.C." on W., with 3 grooves on the S. and N. faces.

Established two bearing trees:

- A pine, 8 ins. diam., bears S17°30'W, 33 lks. dist., mkd. "T28N R27 1/2W S24 BT".
- A tamarack, 8 ins. diam., bears N68°45'W, 62 lks. dist., mkd. "T28N R27 1/2W S13 BT".

1970 Certified Corner Recordation by Stanley J. Skousen, 2532-S: For the closing corner, common to secs. 13 and 24, found original stone, shattered and loosely set, mkd. as described in the surveyor general, and witnessed by the original bearing trees. Set by dist-dist intersect by using the two found bearing trees, a 2 in. diam., galvanized iron pipe, 24 ins. in the ground, with brass cap mkd. as shown.

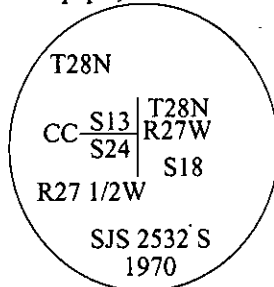

Buried the shattered original stone alongside the iron pipe.

II. Found a 2 in. diam. iron pipe, firmly set, protruding 9 ins. above the ground, with a 2 1/2 in. diam. brass cap, mkd. as shown, and witnessed by the remains of the original bearing trees.

from which:


- A down pine, 12 ins. diam., bears S18°W, 21.8 ft. dist., with visible scribe. (GLO-record)
- A larch, 23 ins. diam., bears N69°W, 40.9 ft. dist., with visible scribe. (GLO-record)

III. Established one new bearing tree and set a post:

- A larch, 12 ins. diam., bears S37°W, 31.2 ft. dist., mkd. "T28N R27 1/2W S24 BT".
- A 6 ft. metal post, N., 3.0 ft. dist. of corner, with a Land Survey Monument decal attached.

Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.
Attached a K-Tag on road, N45°W, 100.0 ft. dist. of the corner.

Magnetic Declination: 20° East

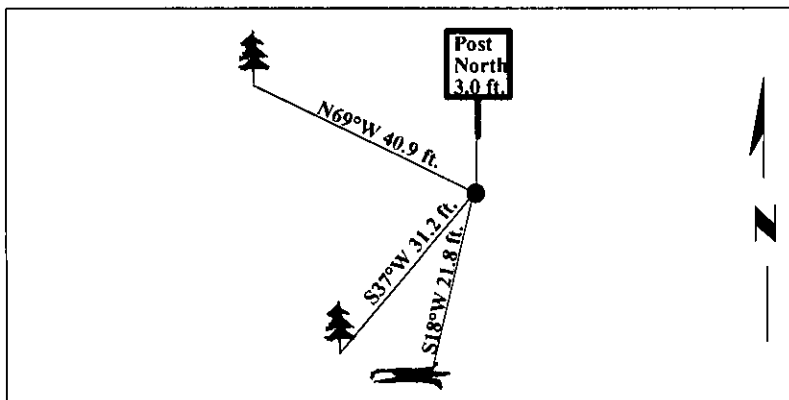

SKETCH OF CORNER

CERTIFICATION

I, Mark Federman
certify the information shown herein is true and correct.

Mark Federman

I, Steven A. Boyer
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Steven A. Boyer STEVEN A. BOYER
Signature of Surveyor & Seal 9750LS

Date: 6/15/98

Reg. No.: 9750LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 10-6-98 and was noted on the cross-index plat and is assigned page No. 10230 in book No. _____.

Coral M. Cunningham
County Official

