LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 05/25/2012 Expiration Date: 05/26/2013

Property Owner: Ed Leonard c/o:

Address: [redacted]

Telephone: (Home) [redacted] (Work)

Installer: Tracy Webb License No. 89

__XX__ New Installation _____ Existing System

_____ Repair _____ Replacement _____ Extension _____ Other

Describe: Using gravelless chambers – installing five 84-foot trenches

Parcel Description:

Legal: S4 T36 R27

Address or Location: Lot 6 of Nutting Ridge Unit #3

Approved Design Criteria:

Bedrooms: 3 Septic Tank Size: 1000 gallons Drainfield Size: 420 Linear Feet

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: *Kendra J. Lind, R.S.*

Closure Statement:

I, _____, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

Title: _____

NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.


406-283-2442

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

LOT LAYOUT

Nutting Ridge Sub: Unit #3
water & sewer plan.
9-14-94

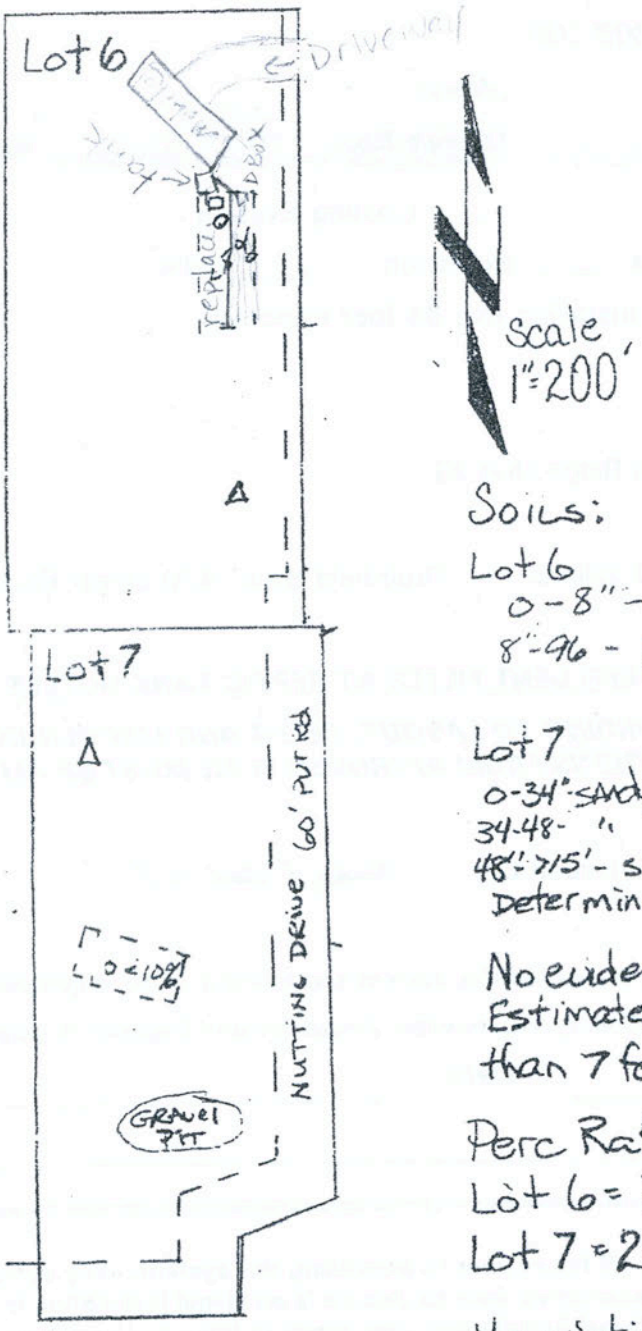

Scale
1" = 200'

Legend
- o - perc test
- □ - test hole
- Δ - well site
- --- drainfield
- replacement site

Soils:

Lot 6
- 0-8" - top soil
- 8"-96 - porous silt loam w/ gravels & cobbles

Lot 7
- 0-34" - sandy loam
- 34-48" " " w/ few gravels
- 48"-> 15' - sand
- Determined by gravel pit

No evidence of groundwater or bedrock. Estimated depth to groundwater is greater than 7 feet.

Perc Rates
Lot 6 = 30 min/inch
Lot 7 = 20 min/inch

No existing septic systems or wells within 100' of boundaries.

Montana Department of Health and Environmental Sciences
APPROVED
Initials _____ Date 10/25/94

RECEIVED
OCT 21 1994
MONTANA
DEPT. OF HEALTH & ENV. SCIENCES
WATER QUALITY BUREAU