

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner of Secs. 22, 23, 26, & 27 T. 28 N., R. 27 1/2 W., P.M.M. Lincoln County

- I. 1902 G.L.O. record by B. S. Adams and W. E. Weeks: "Set a limestone, 15x10x6 ins., 10 ins. in the ground, for cor. of secs. 22, 23, 26 and 27 marked with 2 notches on S. and 2 notches on E. edges; from which

A tamarack, 12 ins. diam., bears N42°30'E, 9 lks. dist., marked T28N R27 1/2W S23 BT.
 A tamarack, 12 ins. diam., bears S64°E, 42 lks. dist., marked T28N R27 1/2W S26 BT.
 A tamarack, 12 ins. diam., bears S70°W, 14 lks. dist., marked T28N R27 1/2W S27 BT.
 A tamarack, 12 ins. diam., bears N42°30'W, 39 lks. dist., marked T28N R27 1/2W S22 BT.

- II. Found a firmly set stone, 15x10x6 ins., mkd. with 2 notches on E. and 2 notches on S. faces, from which

A larch root crown & log, 12 ins. diam., bears N42°E, 6.0 ft. (9 lks.) dist., mkd. 28N 27 1/2 W S BT
 A larch root crown & log, 13 ins. diam., bears S64°E, 27.7 ft. (42 lks.) dist., mkd. T28N R27 1/2 W S26 BT.
 A larch root crown & log, 14 ins. diam., bears S70°W, 9.5 ft. (14 lks.) dist., mkd. T28 R27 1/2 S27 BT.
 A larch root crown & log, 18 ins. diam., bears N42°W, 25.5 ft. (39 lks.) dist., mkd. 28N 27 1/2 W S22 BT.

- III. In place of stone monument, set a 2 1/2 ins. diam. aluminum pipe, 30 ins. long, 25 ins. in the ground with 3 1/4 ins. diam., U.S.D.A., Forest Service, aluminum cap marked as shown:

T28N R27 1/2W
 S22 | S23
 S27 | S26
 9008 LS
 1992

Established four new bearing trees:


A fir, 16 ins. diam., bears N49°E, 34.7 ft. dist., mkd. T28N R27 1/2W S23 BT.
 A pine, 8 ins. diam., bears S66°E, 43.9 ft. dist., mkd. T28N R27 1/2W S26 BT.
 A fir, 6 ins. diam., bears S43°W, 24.3 ft. dist., mkd. T28N R27 1/2W S27 BT.
 A fir, 5 ins. diam., bears N31°W, 23.2 ft. dist., mkd. T28N R27 1/2W S22 BT.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Bury original stone monument alongside aluminum pipe.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, South, 3 ft.

Magnetic Declination: 20° East

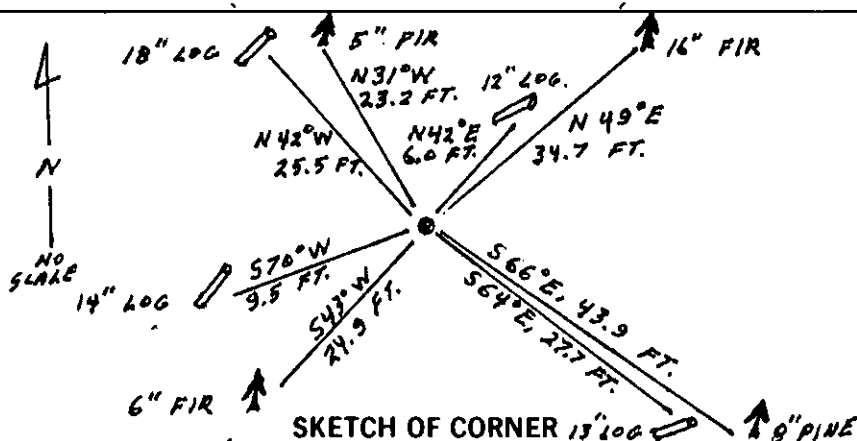

SKETCH OF CORNER

CERTIFICATION

Steve Boyer

I, Steve Boyer, certify the information shown herein is true and correct.

Steve A. Boyer
 Signature Ground Party Chief

Ronald A. Pearson

I, Ronald A. Pearson, certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Ronald A. Pearson
 Signature of Surveyor & Seal

Date: 7/22/92 Reg. No. 9008 LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 8-13-92 was noted on the cross-index plat and is assigned page No. 5090, in book No. Corral M. C. Adams


County Official

R-17

28 N 27 1/2 W

Cross Index No. T. R. PMM

Sec??



• - corner this sheet