

# CERTIFIED CORNER RECORDATION


Corner SE Sec. 33 T. 28N R. 27W P.M., MT Lincoln County

I. 1891 original survey by Newton Orr: Set a post 4 ft. long, 4 ins. square, 24 ins. in the ground, for cor. to secs. 3, 4, 33, & 34, mkd. T28N, S34 on NE; R27W, S3 on SE; T27N, S4 on SW and S33 on NW faces, with 3 notches on E. and W. edges, witnessed by four bearing trees.

1902 G.L.O. resurvey of S. bdy. of Tp. 28, Rs. 27 & 26 by Burton S. Adams: All corners in T28N were held as good, while the corners to the south in T27N shifted. Some of the monument markings and bearing trees to the south were effaced, however the bearing trees to the south of this corner were not.

1981 B.L.M. remonumentation record by Joseph E. French: The cor. of secs. 33 and 34, on the S. bdy. of the Tp., monumented with the decayed remains of the original wood post, and witnessed by the original bearing trees.

At the corner point, set an aluminum post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with an aluminum cap mkd. as shown.

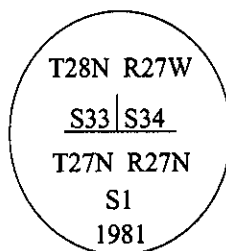

Place the decayed remains of the orig. post alongside and raise a mound of stone, 3 1/2 ft. diam., around the aluminum post.

II. Found a 2 1/2 in. alum. post, firmly set, protruding 3 ins. out of the ground, with a 3 1/4 in. diam. alum. cap mkd. as shown above, from which:

A spruce snag, 23 ins. diam., bears N14°E, 26.5 ft. dist., mkd. with a healed face. (rec.- balsam, at 27.7 ft.)

A larch, 50 ins. diam., bears S15°E, 7.6 ft. dist., mkd. with visible scribing. (rec.-6.6 ft.)

A fallen balsam, 24 ins. diam., bears S47°W, 34.3 ft. dist., mkd. with a healed face. (record)

A larch stump, 38 ins. diam., bears N2°W, 29.4 ft. dist., with a chopped face. (rec.- 30.3 ft.)


III. Established two new bearing trees:

A grand fir, 10 ins. diam., bears N41°E, 14.8 ft. dist., scribed "T28N R27W S34 BT".

A grand fir, 8 ins. diam., bears N39°W, 26.0 ft. dist., scribed "T28N R27W S33 BT".

Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East.

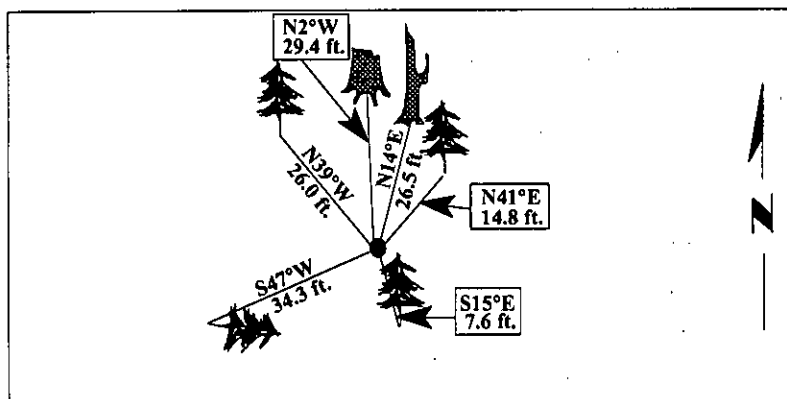

SKETCH OF CORNER

## CERTIFICATION

I, Rex O. Rice

certify the information shown herein is true and correct.

I, Alvah F. Hughes

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Alvah F. Hughes  
Signature of Surveyor & Seal

Date: 11/18/96

Reg. No.: 7322LS

Employer: U.S. FOREST SERVICE

Sec. 33



• - corner this sheet

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 12-28-97 and was noted on the cross-index plat and is assigned page No. 10004 in book No.                     .

Coral M. Cummings  
County Official