


CERTIFIED CORNER RECORDATION


Corner S.C. **Secs.** 19 & 30 **T.** 28N **R.** 27W **P.M., MT** **Lincoln** **County**

- I. 1891 G.L.O. Record by Newton Orr: Set a limestone, 20x10x5 ins., 15 ins. in the ground, for cor. to secs. 19,24,25 & 30, mkd. with 4 notches on the N. and 2 notches on the S. edges. Established four bearing trees.
- 1902 Retracement Survey Record by Burton S. Adams et. al.: Intersect E. bdy. of Tp., 1.46 chs., N. of the cor. of secs. 19,24,25 and 30, which is a stone 10x5, 5 ins. above ground, mkd. and witnessed as described by the surveyor general, as this cor. will hereafter refer to secs. 19 and 30 only, I efface the marks from the S.W. and N.W. bearing trees.
- 1970 B.L.M. Record by Joseph E. French: The cor. of secs. 19 and 30, on the W. bdy. of the Tp., monumented with a limestone, 20x10x5 ins., firmly set, mkd. with 4 notches on the N. and 2 notches on the S. edges, and witnessed by the remains of the original bearing trees. At the corner point, set an iron post, 30 ins. long, 2 1/2 ins. diam., 24 ins. in the ground, with a brass cap, mkd. as shown.



Established one new bearing tree and bury the original stone alongside the iron post.

- II. Found a 2 1/2 in. diam. iron pipe, firmly set, protruding 4 ins. above the ground, with a 3 1/4 in. diam. brass cap, mkd. as shown, and witnessed by the remains of the original bearing trees and the B.L.M. bearing tree.
from which:
- A down larch snag, 24 ins. diam., bears N34°E, 85.8 ft. dist., with visible scribe. (GLO-record)
 - A larch stump, 31 ins. diam., bears S07°E, 35.7 ft. dist., no visible scribe. (GLO-record)
 - A larch, 9 ins. diam., bears S73°E, 45.5 ft. dist., with a healed face. (BLM-record)
 - A pine snag, 18 ins. diam., bears S54°W, 46.8 ft. dist., no visible scribe. (GLO-record)
 - A larch stump, 39 ins. diam., bears N49°W, 30.4 ft. dist., no visible scribe. (GLO-record)
- III. Established one new bearing tree and set a post:
A lodgepole pine, 6 ins. diam., bears N32°E, 48.2 ft. dist., mkd. "T28N R27W S19 BT".
A 6 ft. galvanized steel guard post, N., 3.0 ft. dist. of corner, with a Land Survey Monument decal attached.
- Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.
Magnetic Declination: 20° East

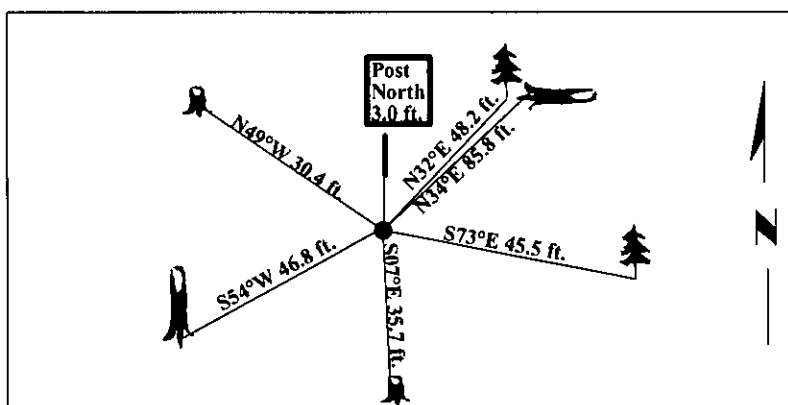

SKETCH OF CORNER

CERTIFICATION

I, Mark Federman
certify the information shown herein is true and correct.

Mark Federman

I, Steven A. Boyer
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Steven A. Boyer
Signature of Surveyor & Seal

Date: 6/11/98

Reg. No.: 9750LS

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 10-6-98 and was noted on the cross-index plat and is assigned page No. 10235 in book No. _____.

Coral M. Cummins By pLB
County Official

