LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 04/23/2026 Expiration Date: 04/22/2027 Permit#26-12641

Property Owner: Catherosa Trust

Mailing Address: [redacted]

Installer: Cory Persson License #: 197

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new pressure dosed system for 2 Bedroom House.

Parcel Description:

Legal: S24, T36 N, R28 W, COS CS 3804, ACRES 13.483, TRACT 1

Property Address: 6108 Black Lake Rd., Rexford, MT 59930 Assessment Code: 12641

DEQ COSA: E.Q.#09-2628 Clarke RSR Date: 7/29/09

Approved Design Criteria: Installation of new pressure dosed system for 2 Bedroom House with 2 Laterals @ 64' with reduction for chambers.

# of Bedrooms: 2	Septic Tank Size: 1000/500 gallons	Trench Width: 36"
# of Laterals: 2	Length of Laterals: 64'	Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.


6108 BLACK LAKE ROAD

13.483 ACRES
6108 BLACK LK RD, REXFORD, MT 59930
S24, T36N, R28W, CS 3040
ASSESSMENT #0000012641
GEO 56-4822-24-1-01-07-0000
COSA #09-2628, DATED 7-2009


REV	DESCRIPTION	BY/DATE	APRD/DATE

DRAINFIELD SIZING

(2) BEDROOM= 225 GPD
225 GPD/0.5 APP= 450 SQFT
450 SQ FT/3' CHAMBERS= 150 LF
REDUCTION FOR 0.5 APP= 15%
150' X 0.85= 128 LF
128 LF= (2) 64' LATERALS

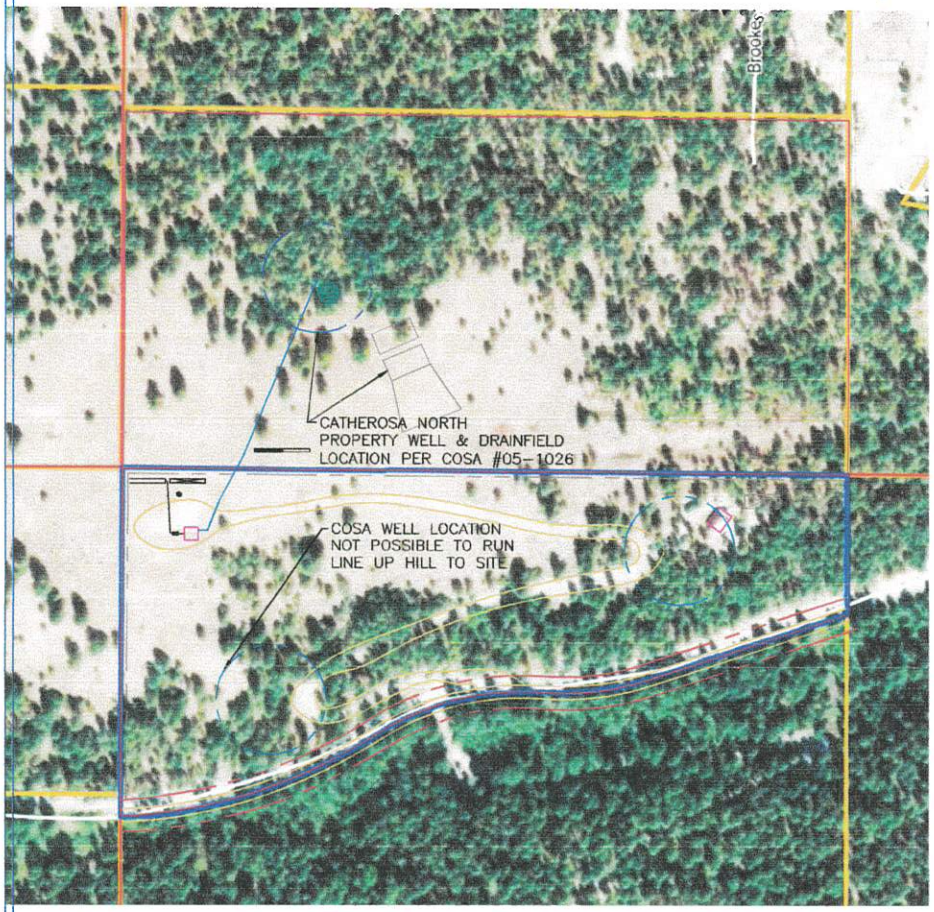

CATHEROSA SITE LAYOUT

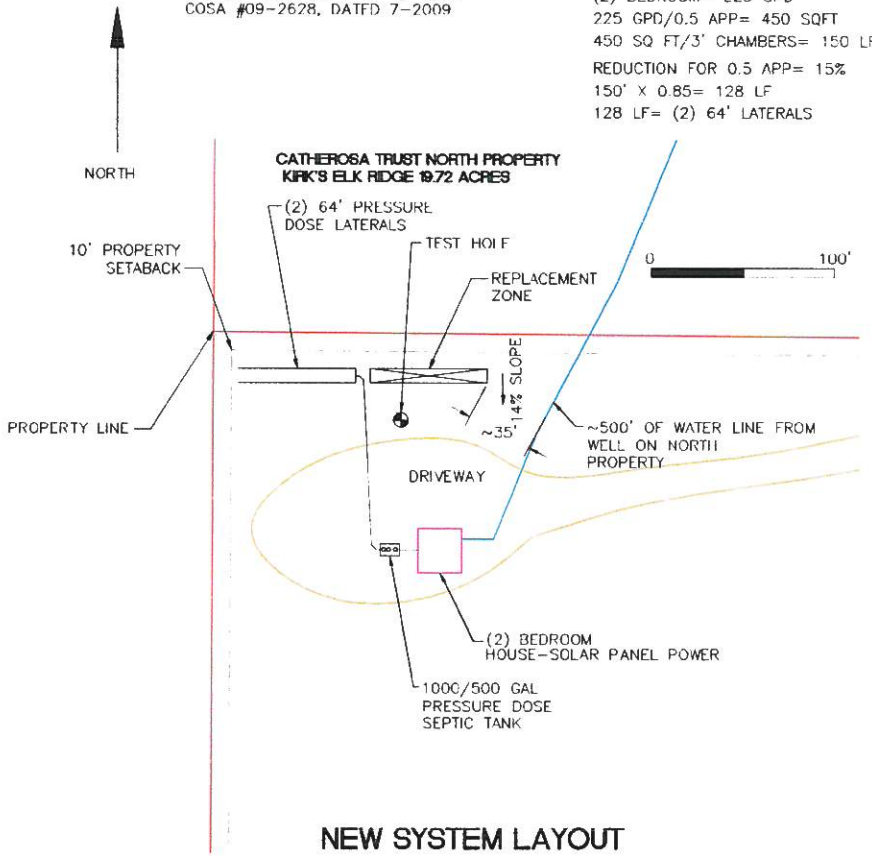

NEW SYSTEM LAYOUT

REV	DATE	COMPANY	SCALE:	BUBBA'S EXCAVATION CATHEROSA SEPTIC
		MDS	1/16 & NOTED	SITE LAYOUT
		CONTRACT: VERBAL	DATE: 8/2025	3/25/26
		PLOT FILE: PML-0001	WEIGHT	D. PERSON 3/30/26
				449-001 1

THIS DRAWING IS PROPERTY OF MDS WATER, CONTRACT HAS BEEN RECEIVED BETWEEN OWNER & MDS IT CAN NOT BE SUBMITTED TO ANY OTHER PARTIES WITHOUT WRITTEN APPROVAL FROM MDS ENGINEERING

⑥ ⑤ ④ ③ ②