LINCOLN COUNTY
DEPARTMENT OF ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 11/03/2009 Expiration Date: 11/04/2010

Property Owner: Scott Colgrove c/o:

Address: [redacted]

Telephone: (Home) [redacted] (Work)

Installer: Bob Cuffe License No. 141

__XX__ New Installation _____ Existing System

_____ Repair _____ Replacement _____ Extension _____ Other

Describe: Installing pressure-dosed system on easement on adjacent 80-acre tract of land owned by Scott Colgrove.

Parcel Description:

Legal: S22 T36 R26

Address or Location: Lot 10 of Glen Lake Park

Approved Design Criteria:

Bedrooms: 4 Septic Tank Size: 1500 gallons Drainfield Size: 375 Linear Feet

Dosing Tank Size: 500 gallons

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET !!

Special Instructions: INSTALL SYSTEM ACCORDING TO LAYOUT, DEQ-4 AND LINCOLN COUNTY WASTEWATER REGULATION #3. ANY DEVIATIONS FROM APPROVED PLAN MUST BE AUTHORIZED BY THE DEPARTMENT.

Issued By: Kendra J. Lind, R.S.

Closure Statement:

I, _____, have inspected this system and found it to be in compliance with the conditions of the permit, and the Lincoln County Wastewater Treatment and Disposal Regulation.

Signed: _____ *Date:* _____

Title: _____

NOTICE: The Department must be notified at least 48 hours prior to backfilling the system. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation No. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.


406-293-7781

DISCLAIMER

This permit is not a guarantee by the Department that the system will function properly for a prescribed period of time.

COLGROVE PROPERTY

LOT 10, GLEN LAKE PARK , SECTION 22-T36N-R26W
LINCOLN COUNTY

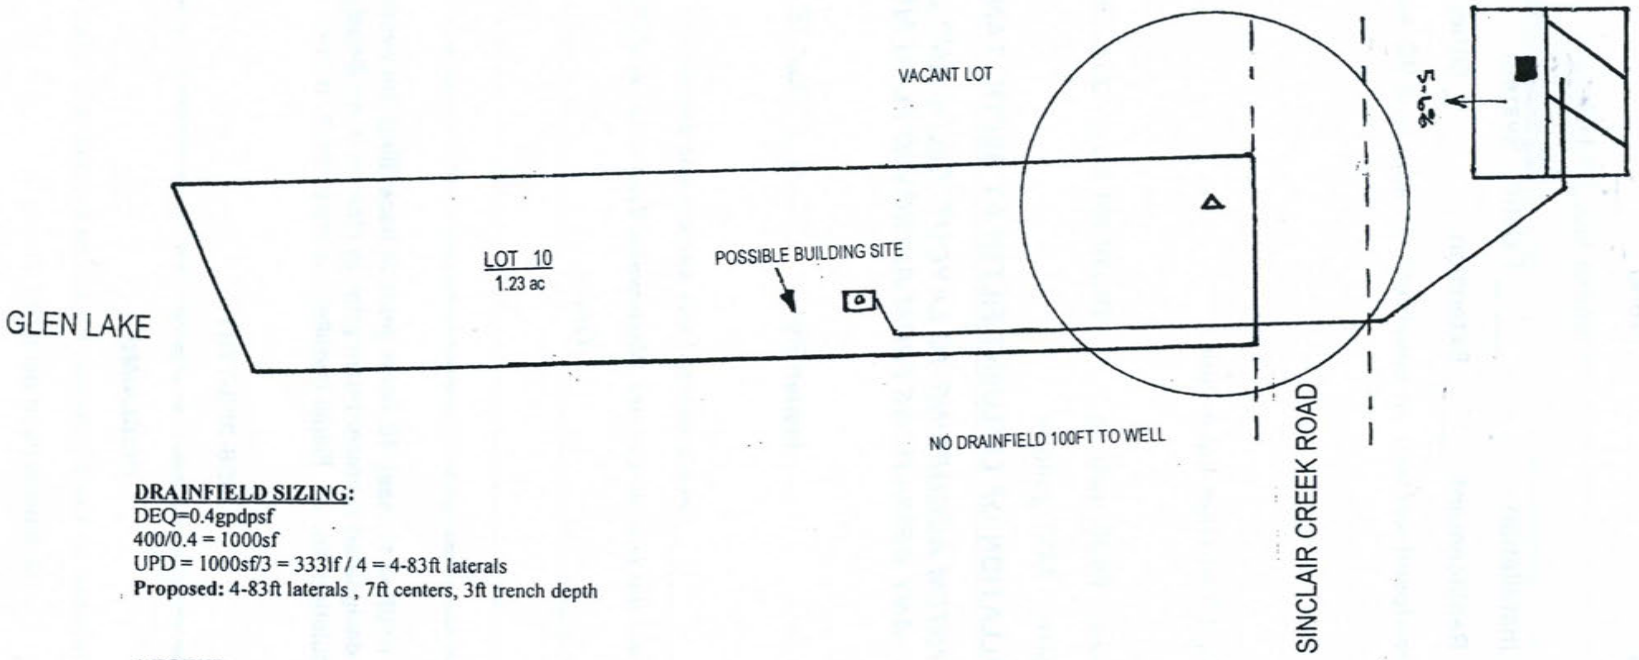

DRAINFIELD SIZING:
DEQ=0.4gpdpsf
400/0.4 = 1000sf
UPD = 1000sf/3 = 333lf / 4 = 4-83ft laterals
Proposed: 4-83ft laterals , 7ft centers, 3ft trench depth

LEGEND

PRIMARY / REPLACEMENT DRAINFIELD

Δ PROPOSED WELL

■ TEST HOLE

N

1" = 100'

Jere Johnson, R.S
Environmental Health Consulting
4572 Whitefish Stage Road
Whitefish MT 59937