# LINCOLN COUNTY HEALTH DEPARTMENT
## ENVIRONMENTAL HEALTH
## WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 5/14/26 Renewal 04/30/2025 Expiration Date: 5/13/27 Permit# 26-14373

Property Owner: Matt Kobylski

Mailing Address: [redacted]

Installer: Sean McNamara License #: 221

*Approved Work:* (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new pressure dosed system for 3 Bedroom House.

Legal: S22, T35 N, R26 W, COS 4900, ACRES 40.46, TRACT 4

Property Address: US HWY 93 S. Eureka, MT 59917 Assessment Code: 14373

DEQ COSA: EQ# Date:

*Approved Design Criteria:* Installation of new pressure dosed system for 3 Bedroom House with 3 Laterals @ 76' with reduction for chambers.

# of Bedrooms: 3 Septic Tank Size: 1000/500 Gallon Trench Width: 36"

# of Laterals: 3 Length of Laterals: 76' Trench Depth: 24"-36"

**SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!**

*Special Instructions: Install system according to the Lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, Circular DEQ-4, and COSA(if applies). Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.*

**Issued By:** Robin Blumberg, RS

**NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.**


Closure Statement:

*This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.*


*Signed:* Robin Blumberg *Date:* 5/19/26

***This permit is not finalized until the system is inspected and the closure statement is signed.***

***This permit is not a guarantee that the system will function properly for a prescribed period of time.***

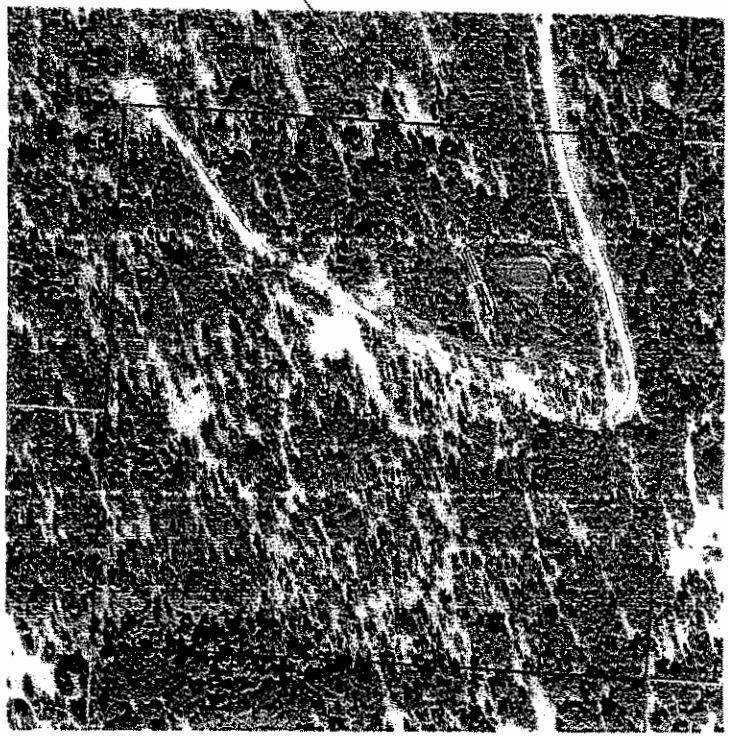


KOBYLSKI SITE LOCATION

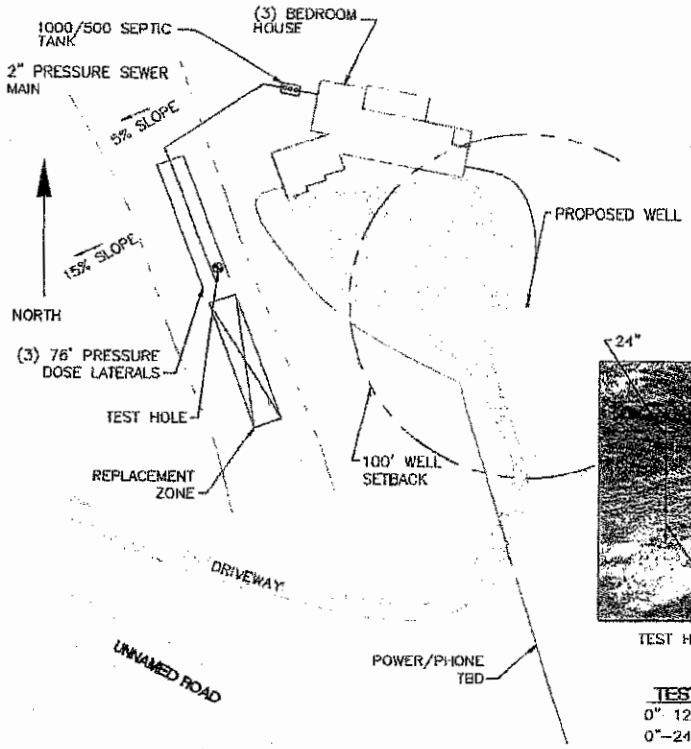



KOBYLSKI SEPTIC SYSTEM

## TRACT 4


40.46 ACRES
US HWY 93 SOUTH (ADDRESS & ROAD NAME NEEDED)
S22, T35N, R26W, COS 4900
ASSESSMENT #0000014373
GEO 56-4717-22-1-01-30-0000

## DRAINFIELD SIZING

(3) BEDROOM= 300 GPD
300 GPD/0.4 APP= 750 SQFT
750 SQ FT/3' CHAMBERS= 250 LF
REDUCTION FOR 0.4 APP= 10%
250' X 0.90= (3)-76' LATERALS



99" SOIL PROFILE HOLE

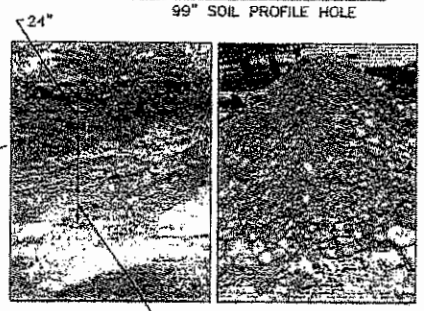


## TEST HOLE INFO:

0"-12"= TOP SOIL
0"-24"= ROOT DEPTH
24"-46"= LOOSER SILTY LOAM, 15% ROCK
46"-99"= FIRM SILTY LOAM, 25% ROCK

TEST HOLE WAS EASY TO DIG TO THE 46" DEPTH VERY FIRM WITH SMALL AND LARGE ROCK TO 99" 0.4 APP RATE WAS DETERMINED

KEI

KOOCANUSA EXCAVATING
KOBYLSKI SEPTIC
LAYOUT