INSTRUCTIONS

found, note discrepancies in the record, state method of esta-Description of evi

Description of monument and accessories set to perpetuate the corner position.

4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.

5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.

6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner Sec. 15 T. 28N R. 29W P.M.M. Lincoln County

(Record G.L.O.) Set a Quartz stone 14x14x5 9 ins in ground with $\frac{1}{4}$ on N. face. From which

A Pine 8" diam. bears S370W 12 lks 1


A Pine 5" diam. bears N19°E 6 1ks (Record B.L.M.) Set an iron post 30 x 2 1/2" in the ground with brass cap marked L/4 S15 &22 1964. From which


Pine 9" diam. bears S37°W 12 lks 1/4 S22BT(origional) Fir 7" diam. bears N32°E 19 lks 1/4 S15 BT

(Found) 1964 B. L.M. Brass cap as noted from which:

Pine 9" diam standing dead bears S370 N.79' W/ Scrib Fir 7 " diam alive bears N32° E 12.5' W Scrib

6' steel post app. 3 south of monument and marked Set) new B.T.as follows: 10" white fir bears S17°W 18.4' scribed 1/4 S 22BT

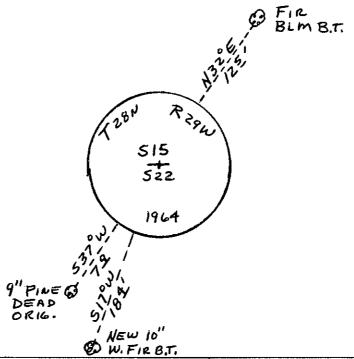

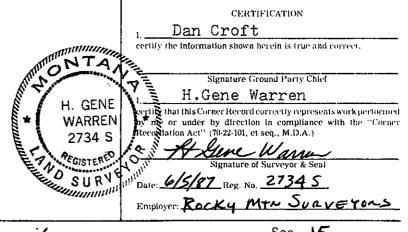

· - corner this sheet

SKETCH OF CORNER

Sec. Office of Clerk and Recorder, County of . This "corner . day of 19*5*,7 was noted on the cross-index plat and is assigned page No. Sugal by Sick, County Official book No. .

Cross Index No. N-15 T. 28N R. 29W PMM