LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 06/04/2026 Expiration Date: 06/03/2027 Permit#26-59777

Property Owner: Robert Mast

Mailing Address: [redacted]

Installer: Junior Miller License #: 52

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of new gravity system for 1 Bedroom House.

Parcel Description:

Legal: S09, T37 N, R28 W, ACRES 20, W2NESE

Property Address: 88 Spring Creek Rd., Rexford, MT 59930 Assessment Code: 59777

DEQ COSA: E.Q.# Date:

Approved Design Criteria: Installation of new gravity system for 1 Bedroom House with 2 Laterals @ 85' with reduction for chambers.

# of Bedrooms: 1 Septic Tank Size: 1000 gallons Trench Width: 24"

# of Laterals: 2 Length of Laterals: 85' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: Robin Blumberg *Date:* 8/20/26

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.

Legend

- test hole
- drainfield site
- replacement area
- existing well w/100' isolation zone
- mixing zone
- septic tank

Name: Mast
County:Lincoln
Location: sec.09-T37N-R28W


NOTE-

1. NO nearby wells, septic systems, lakes, streams, wetlands,springs or irrigation ditches within 100 ft. of the subdivision perimeter. Existing, previously approved and existing well, wastewater treatment systems and drainfields; and existing & approved mixing zones and other sources of contamination within 100 feet of the proposed subdivision are shown No lagoons within 1,000 feet of proposed well.
2. NO Drainfields exist within 500 ft. of existing well.
5. Completion of the proposed subdivision will not increase the amount of pre-development, during a 100-year, 24 hour storm event, between proposed lots and from the proposed subdivision area to the ajoining properties.
6. Each house foundation to be one foot above natural ground surface,



Scale: 1"= 200'

0 SCALE 200
FEET

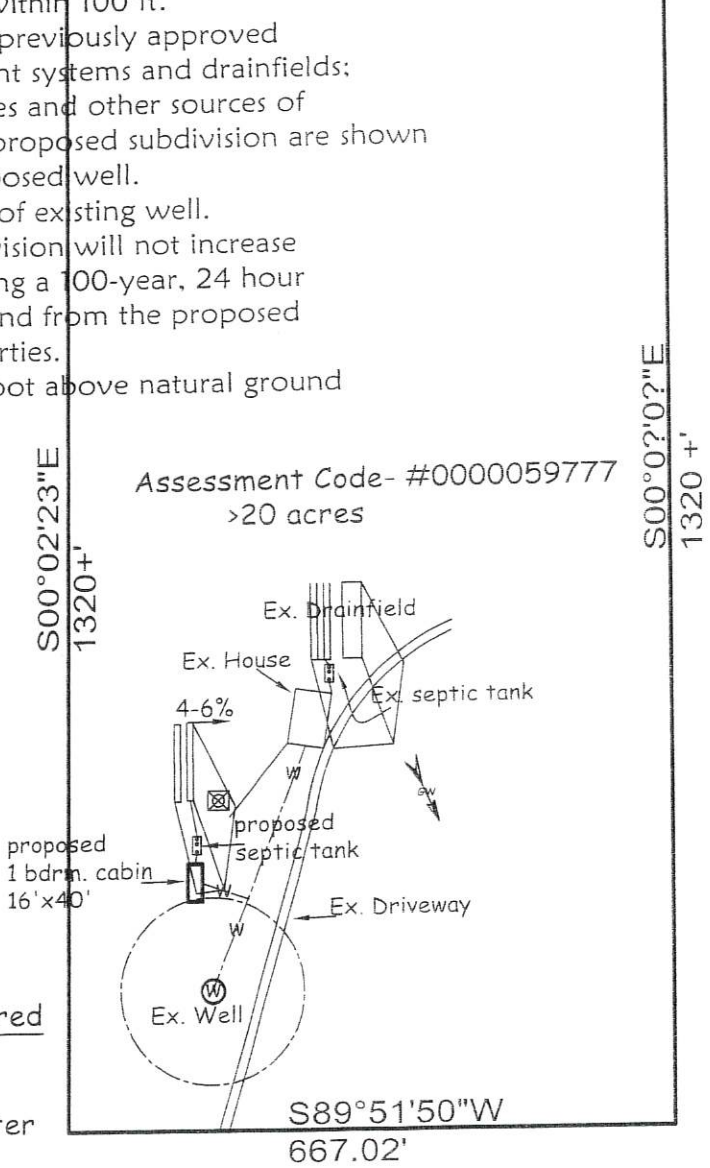

Drainfield Design Standards
for each proposed drainfield
1 bdrm. home gravity system chambered
0.4 gpd/ft2- application rate
169 Lin. ft. x 2' wide trenches=
2 laterals @ 85 lin. ft. & 7 ft. on center
1,000 gal. septic tank

Enviro-Tech
Consulting Inc.
PO Box 5674
Kalispell, MT 59903
(406)257-2795