LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 02/23/2026 Expiration Date: 02/22/2027 Permit#26-7427

Property Owner: Nelmar Holdings LLC.

Mailing Address: [redacted]

Installer: Brian Olson License #: 187

Approved Work: (Check One) ☐ New Installation ☒ Existing System

☒ Replace Drainfield ☒ Replace Tank ☐ Extension

Describe: Installation of Elevated Sand Mound to replace failing system.

Legal: LICK LAKE 2, S26, T36 N, R26 W, LOT 2, ACRES 62.96, PM 7213

Property Address: 3158 Glen Lake Rd., Eureka, MT 59917 Assessment Code: 7427

DEQ COSA: E.Q.# Date:

Approved Design Criteria: Installation of Elevated Sand Mound to replace failing system.

# of Bedrooms: 5 Septic Tank Size: 1000+1000/500 gallons ESM: 24' X 66.5'

# of Laterals: 5 Length of Laterals: 62.5'

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the COSA, lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, and Circular DEQ-4. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: *Robin Blumberg, RS*

NOTICE: **The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.**

Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.


Signed: Robin Blumberg *Date:* 8/3/26

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.

NELMAR HOLDINGS LLC



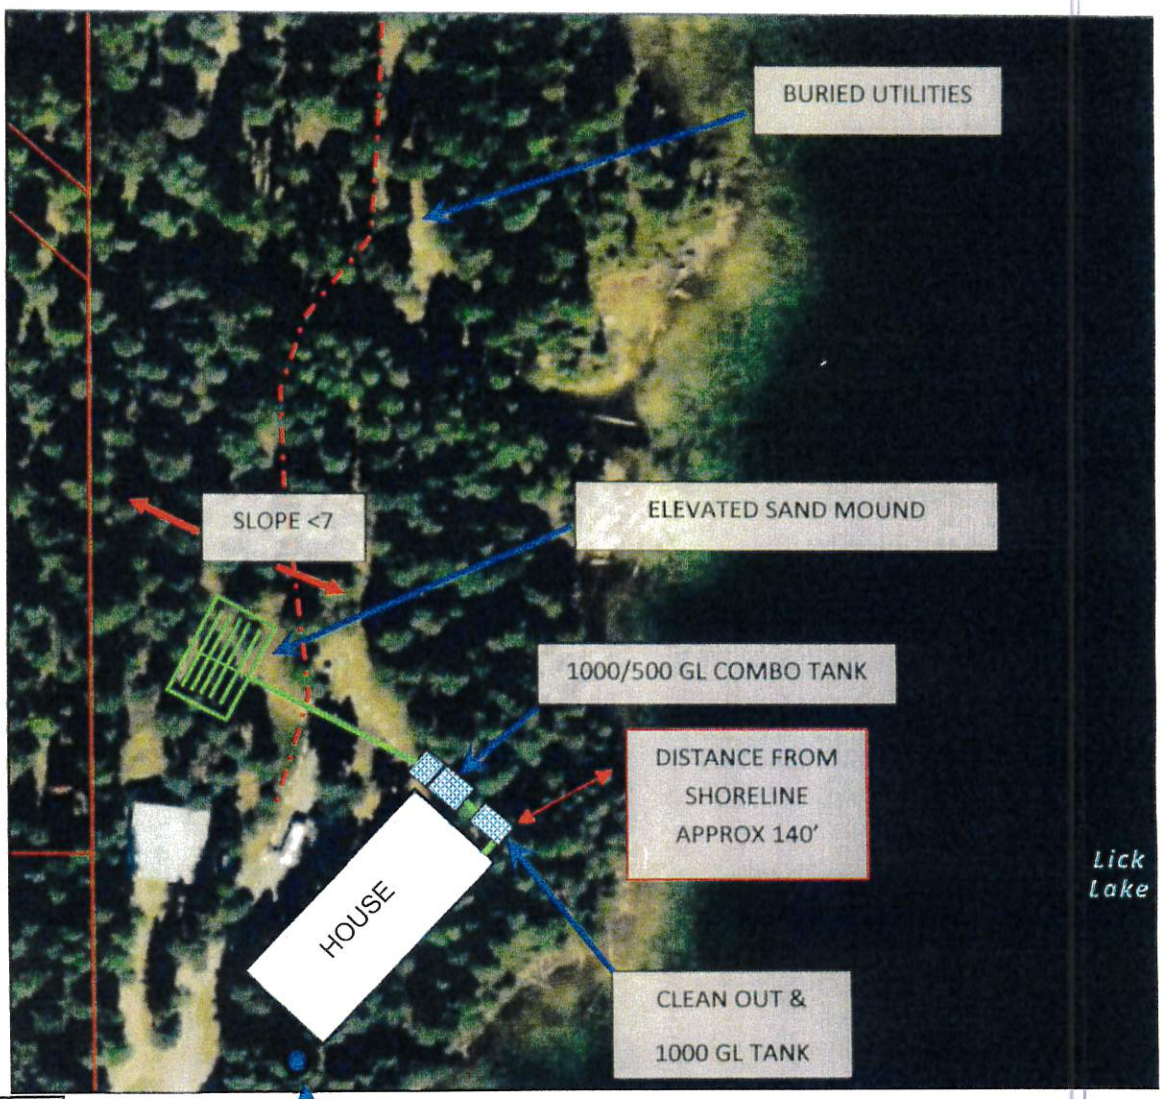

- **ELEVATED SAND MOUND - 20' W X 62.5' L (24'W X 66.5'L BED SIZE)**
- **ME 50 PUMP,** (5) 62.5' LATERALS W/4' SPACING, CENTER MANIFOLD
- 1 ½ IN SCH 40 PVC 1/8 IN HOLES EVERY 5'
- DISTANCE FROM WATER OR OTHER NOTES PARTICULAR TO PROJECT

LICK LAKE 2, S26, T36 N, R26 W, Lot 2, ACRES 62.96, PM 7213