

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 Cor. of Sec. 36 only T. 28 N. R. 29 W. P.M.M. Lincoln County

I. 1902, G.L.O. original record by Burton S. Adams et al:

1964, B.L.M. remonumentation record by Richard L. Larimer et al: "The 1/4 sec. cor. of sec. 36, on the S. bdy. of the Tp., monumented with a limestone, 15 x 12 x 8 ins., loosely set and mkd. 1/4 on the N. face, and witnessed by the original bearing trees. At the corner point, set an iron post, 30 ins. long, 2 1/2 ins. diam., 27 ins. in the ground, with brass cap mkd.

T28N R29W
1/4 S 36
1964

from which

The original bearing trees:

A pine, 24 ins. diam., bears S65°W, 34 lks. dist., mkd. with an overgrown blaze. (Record)
A fir, 20 ins. diam., bears N35°W, 24 lks. dist., mkd. 1/4 S36 BT. (Record: N39°W, 17 lks.)

Bury the original stone alongside of the iron post."

II. Found, a set 2 1/2 in. dia. iron pipe, 6 ins. out of the ground, with 3 1/4 in. dia., B.L.M. brass cap marked as shown above, from which

A pine, 25 ins. dia., bears S66°W, 22.4 ft. (33.9 lks.) dist., scribe partially visible.
A douglas fir, 20 ins. dia., bears N34°W, 15.1 ft. (22.8 lks.) dist., scribe partially visible.

III. Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs where needed.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, east, 3 ft.

Magnetic Declination: 20°30' East



CERTIFICATION

I, Gary C. Crismon
certify the information shown herein is true and correct.


Gary C. Crismon
Signature Ground Party Chief

I, Ronald A. Pearson
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-103, et seq., M.C.A.)

Ronald A. Pearson
Signature of Surveyor & Seal

Date: 12/21/89 Reg. No. 9008 LS


Employer: U.S. FOREST SERVICE

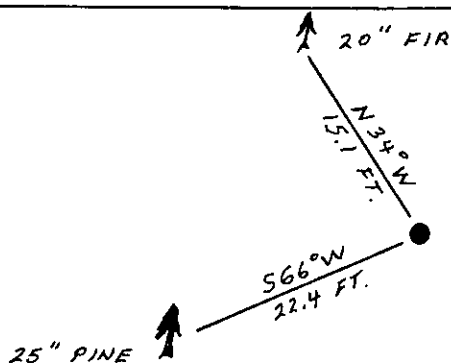

SKETCH OF CORNER

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Jan 9, 1990 was noted on the cross-index plat and is assigned page No. 4201, in book No. _____

Cross Index No. Z-23 T. 28 N R. 29 W PMM



• - corner this sheet