-CERTIFIED CORNER RECORDATION


Corner 1/4 Secs. 33&34 T. 28N R. 30W P.M., MT Lincoln County

I. 1900 G.L.O. Record by Burton S. Adams: Set a lime stone, 16x10x8 ins., 11 ins. in the ground, for 1/4 sec. cor. mkd. "1/4" on W. Face.

Established two bearing trees:

A tamarack, 8 ins. diam., bears N88°30'E, 23 lks. dist., mkd. "1/4 S34 BT". A pine, 14 ins. diam., bears N76°45'W, 35 lks. dist., mkd. "1/4 S33 BT".

1969 B.L.M. Remonumentation Record by Roy G. Leedy: The 1/4 sec. cor. of secs. 33 and 34, as determined from the original bearing trees. At the corner point, set an iron post, 30 ins. long 2 1/2 ins. diam., 24 ins. in the ground with brass cap mkd. as shown.



Established one new bearing tree.

II. Found a 2 1/2 in. diam. iron pipe, firmly set, protruding 10 ins. above the ground, with a 3 1/4 in. diam. B.L.M. brass cap, mkd. as shown.

from which:

A stump w/ fallen larch, 10 ins. diam., bears N88°E, 15.2 ft. dist., with visible scribe. (GLO-record)


A larch, 7 ins. diam., bears S59°E, 19.8 ft. dist., with a healed face. (BLM-record)

A larch, 21 ins. diam., bears N77°W, 23.1 ft. dist., with visible scribe. (GLO-record)

III. Built up a small collar of stone around the iron pipe.

Painted bearing trees and attached Land Survey Monument and Bearing Tree signs.

Magnetic Declination: 20° East

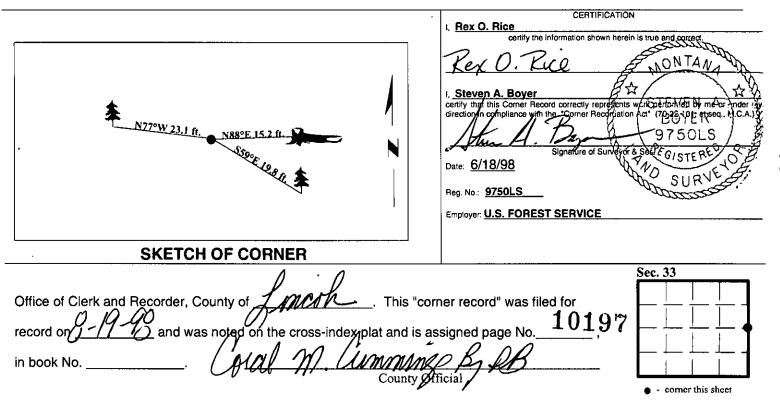

Cross Index

X-13

T. 28N

P.M., MT

30W