LINCOLN COUNTY HEALTH DEPARTMENT
ENVIRONMENTAL HEALTH
WASTEWATER TREATMENT AND DISPOSAL SYSTEM PERMIT

Issue Date: 08/12/2026 Expiration Date: 08/11/2027 Permit#26-59752

Property Owner: Josh Erickson

Mailing Address: [redacted]

Installer: Dale Schmidt License #: 217

Approved Work: (Check One) ☒ New Installation ☐ Existing System

☐ Replace Drainfield ☐ Replace Tank ☐ Extension

Describe: Installation of gravity system for 3 Bedroom House.

Legal: LAZY AJ ACRES AMD LOT 5A, S34, T37 N, R27 W, LOT 5B, ACRES 2.84, CS5131

Property Address: 185 Tia Lane, Eureka, MT 59917 Assessment Code: 59752

DEQ COSA: E.Q.# 12-1046 Date: 8/12/26

Approved Design Criteria: Installation of gravity system for 3 Bedroom House with 4 Laterals @ 50' with reduction for chambers.

# of Bedrooms: 3 Septic Tank Size: 1000 Trench Width: 24"

# of Laterals: 4 Lateral Length: 50' Trench Depth: 24"-36"

SYSTEM MUST INCLUDE INSTALLATION OF EFFLUENT FILTER AT SEPTIC TANK OUTLET!!

Special Instructions: Install system according to the lot layout, the Lincoln County Wastewater Treatment and Disposal Regulation, Circular DEQ-4, and COSA(If Applies). Reduction given for chambers. It is the installer's responsibility to ensure that all required horizontal setbacks are met. CHANGES MUST BE PRE-AUTHORIZED BY THE DEPARTMENT.

Issued By: Robin Blumberg, RS

NOTICE: The Department must be notified at least 3 business days (72 hours) prior to backfilling the system. Call 406-283-2442. Any system not inspected by the Department or its designated representative prior to closure is an illegal installation in violation of Lincoln County Health Board Regulation Ch. 3. Illegal installations may result in fines and/or requirements to remove or reconstruct the system.


Closure Statement:

This system is in compliance with the approved design criteria and Lincoln County's Wastewater Treatment and Disposal Regulation.

Signed: John Blumberg *Date:* 9/3/26

This permit is not finalized until the system is inspected and the closure statement is signed.

This permit is not a guarantee that the system will function properly for a prescribed period of time.

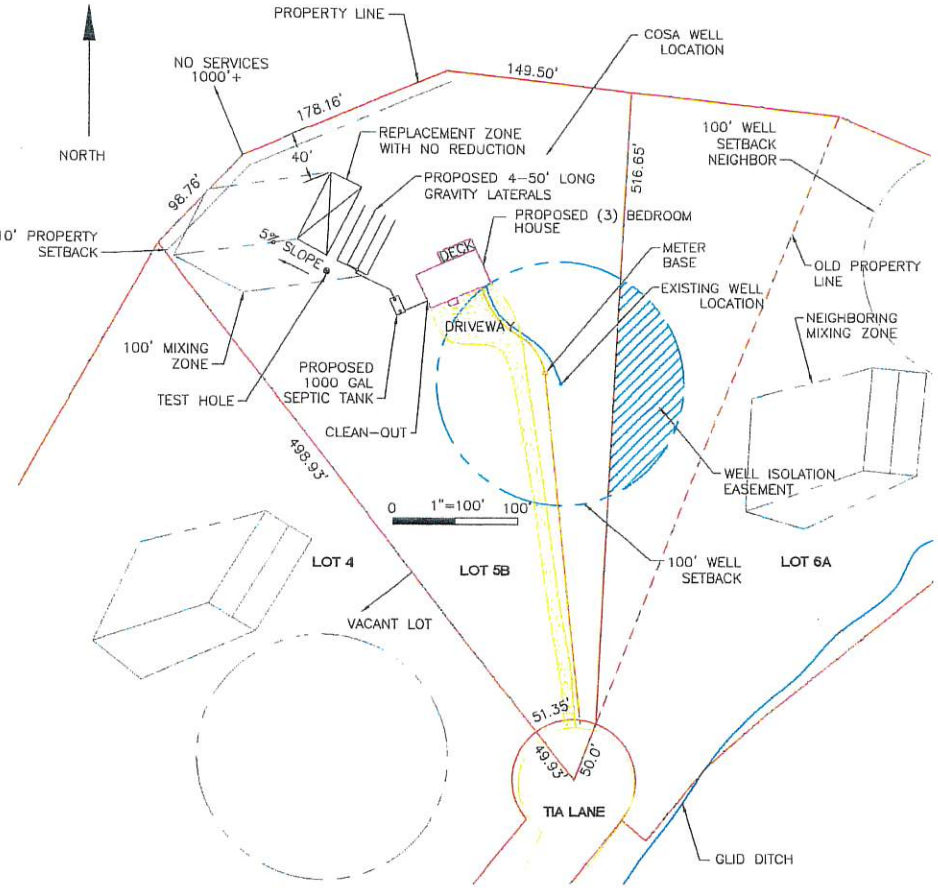

ERICKSON SITE LAYOUT

RLL FOR LOT 5B LAZY AJ ACRES

⑥ ⑤ ④ ③ ②

DRAINFIELD SIZING

(3) BEDROOM= 300 GPD
300 GPD/0.6 APP= 500 SQFT
500 SQ FT/2' CHAMBERS= 250 LF
REDUCTION FOR 0.6 APP= 20%
250 LF X 0.80= 200 LF
200 LF= (4) 50' LATERALS

LOT 5B

2.84 ACRES
185 TIA LANE, EUREKA, MT 59917
SE 1/4 S34, T37N, R27W, LAZY AJ ACRES
ASSESSMENT #0000059752
GEO 56-4928-24-4-04-05-0000
COSA #12-1046, DATED: 8-2011

Reviewed by the Local Reviewing Authority
Under contract with the
Department of Environmental Quality
Local Reviewer Date 8/12/26

Accepted under contract
NA
DEQ Representative Date

THIS DRAWING IS PROPERTY OF MDS. USED UNDER CONTRACT AND MUST BE RETURNED UPON REQUEST. OWNER & MDS. IT CAN NOT BE SUBMITTED TO ANY OTHER PARTIES WITHOUT WRITTEN APPROVAL FROM MDS MANAGEMENT

REV	DATE	COMPANY	SCALE	MONTANA DESIGN SERVICES, INC. ERICKSON SEPTIC
		MDS	1/16 & NOTED	SITE LAYOUT
		CONTRACT: VERBAL	DATE: 4/2026	DRAWN BY: DMS 5/11/26
		PLOT FILE: PML-0001	MODIFY	M. NASSON 8/9/23
			FINISH	JOB NO. 517-001 1