INSTRUCTIONS

Original and/or subsequent record used to evaluate the corner position

2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated

3. Description of monument and accessories set to perpetuate the corner position

4. Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.

5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.

6. Ethic Corner Land.

6. Fill in Cross Index & Seciton Diagram at bottom of sheet

#62-82-5

CERTIFIED CORNER RECORDATION

Wa Cor. Sec. 1 26W Lincoln :___ P.M.M. _ Corner_ County


> I. Set an aluminum post, 30 ins. long, $2\frac{1}{2}$ ins. diam., 22 ins. in the ground, with BLM Aluminum Cap marked as shown below, from which: The original bearing tree: A tamarack, 38 ins. diam., bears N44°E, 43 lks. dist., marked T29N., R.26W S BT

The new bearing tree:

book No.

A larch, 6 ins. diam., bears N60½°W, 7 lks. dist. marked ¼ S2 BT. Buried original stone alongside the aluminum post and raised 2' diam. collar of stones.

II. Found a aluminum post 2½ ins. diam. with BLM Aluminum Cap as described above. Set fiberglass post alongside corner painted blazes and corner red. Found bearing trees as described above.

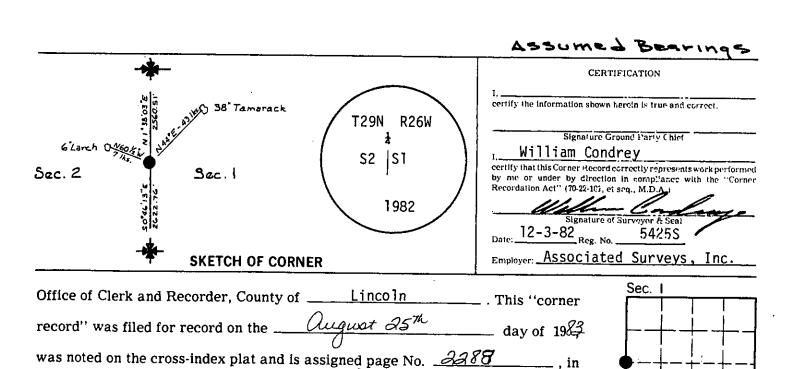

Siegel by Betty L. Conces

County Official Deputy C-21 T. 29N R. 26W PMM

corner this sheet