

CERTIFIED LAND CORNER RECORDATION

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

ORIGINAL G.L.O. NOTES: "Set a trachite stone, 15x8x6 ins. 10 ins. in the ground, for cor. of secs. 15,16,21 and 22, marked with 3 notches on the S. and E. edges; from which
 A pine, 6 ins. diam. bears N. 26°30' E., 37 lks. dist., marked T 29 N R 27 W S 15 B T.
 A tamarack, 8 ins. diam., bears S. 48°30' E., 51 lks. dist., marked T 29 N R 27 W S 22 B T.
 A pine, 9 ins. diam., bears S. 33°30' W., 33 lks. dist., marked T 29 N R 27 W S 21 B T.
 A fir, 6 ins. diam., bears N. 47° 45' W., 21 lks. dist., marked T29 N R 27 W S 16 B T."

FOUND: FOUND BRASS CAP MONUMENT SET BY THE B.L.M.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: June 1981


ORIGINAL EVIDENCE FOUND
 28" Fir overgrown blaze

NEW EVIDENCE FOUND OR SET
 dead larch tree

10" Fir scribed
 "T29N R27W
 S15 BT"

Cor. Mon.

15" Spruce scribing visible

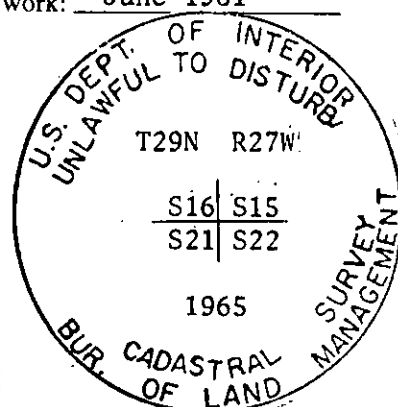

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
 (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

SEE CERTIFICATE OF SURVEY NO. 956, RECORDS OF LINCOLN COUNTY

DIAGRAM OF CORNER:

T29N R27W



S16 S15
 S21 S22

= Corner recorded on the sheet

Surveyor's Seal

I, EDWARD FOY
 certify that the information shown herein is true and correct.

Edward Foy
 Signature of Ground Party Chief

I, JAMES BURTON
 certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

James Burton
 Signature of Surveyor

5428S

Registration Number

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 14th day of October 1981, was noted on the cross-index plat and is assigned page No. 1337, in book No. _____

Cleanor L. Vaughn
 County Official

Cross Index No. N-13 T 29 R 27 Mer.