

CERTIFIED LAND CORNER RECORDATION
(REFERENCE FSH 5681.65)

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

Found stone in place marked as described. (Record - Trachite Stone 17" x 9" x 4", 12" in ground marked 1/4 on West face.) Section 18 B.T. marked as described (Record - BT 6" Fir marked 1/4 S 18 B.T., bears N 87° E, 59 links.) Sec 13 B.T. 10" Pine matching bearing and distance but scribing apparently chopped off. (Record - 8" Pine marked 1/4 S 13 B.T., bears S 88° W, 27 links.)

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED
TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: 7/19/63

Set GI pipe 1-1/2" diam., 28" long with brass cap marked as shown; placed stone along side of brass cap.



SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY.
(MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

None

Surveyor's Seal

I, _____
certify that the information shown herein is true and correct.


Signature of Ground Party Chief

I, _____
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Herman Berg
Signature of Surveyor

1963-5
Registration Number

DIAGRAM OF CORNER:

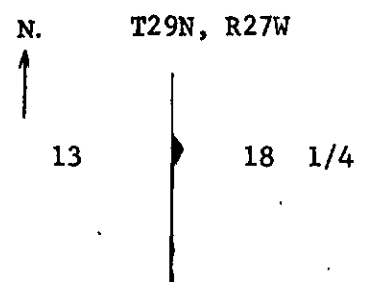

= Corner recorded on the sheet

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 8th day of October 1965, was noted on the cross-index plat and is assigned page No. 40, in book No. 1

M. M. MANSFIELD, By: *Kerwin H. Giden*
County Official Deputy.

Cross Index No. L-1 T. 29 R. 27 Mer.

L-25 29-28