

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner No. 2 U.S.M.S. No. 6496 in Sec. 24 T. 29 N., R. 28 W., P.M.M. Lincoln County

1. 1901 Original Record:

Set a post 6 ins. square, 4 ft. long, 2 ft. deep, marked: 2-6496 for Cor. No. 2

From which: A Blazed Pine tree, 14 ins. in diam., marked: B.T. 2-6496 bears N. $1^{\circ}35'E$. 67 ft.

A Blazed Tamarack tree, 12 ins. in diam., marked: B.T. 2-6496 bears N. $60^{\circ}50'W$. 100 ft.

2. 8/9/83 Evidence Found:

Found old, painted, squared post preserved in duff

From which: A 30 ins. in dia. Ponderosa Pine bears N. $1^{\circ}35'E$. 67 ft. with chopped out blaze, exposing charred face with faint scribing visible- 2 B 6 on left edge of face.


3. 8/9/83 Perpetuation:

Set a 5/8 inch dia. x 24 inch long rebar with yellow PVC cap stamped: MDL 4232S in the hole the old post came out of, with old post laid beside.

From which: Original 30 inch dia. Ponderosa Pine bears N. $1^{\circ}35'E$. 67 ft. with chopped out blaze, exposing charred face with faint scribing visible- 2 B 6 on left edge of face.

New 1 1/2 inch dia. Doug. Fir bears S. $64^{\circ}E$. 4.4 ft. marked with an "X" breast high and scribed: 2 6496 BT on a blaze at the base of the tree.

Both faces of B.T.s and "X" painted red.

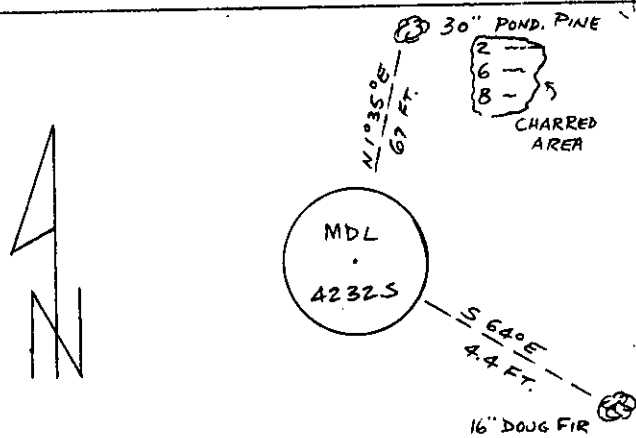

SKETCH OF CORNER

CERTIFICATION

Russ Hudson

certify the information shown herein is true and correct.

Russell Hudson
Signature Ground Party Chief

Melvin D. Lauteren

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Melvin D. Lauteren
Signature of Surveyor & Seal

Date: 8/11/83 Reg. No. 4232S

Employer: Kootenai Engineering, Inc
St. Regis

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on the 16th day of August, 1983, was noted on the cross-index plat and is assigned page No. 2279, in book No. Janet B. Siegel by Betty L. Conner

County Official deputy

Cross Index No. 29 R. 28 P.M.M.

Sec. 24, T29N, R28W, PMM

COR No. 2	U.S.M.S. No. 6496
24	

• - corner this sheet