


INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner 1/4 Cor. of Secs. 27 & 34 T. 29 N. R. 28 W. P.M.M. Lincoln County

- I. 1903 original G.L.O. record by George A. Fessenden and Ranney Y. Lyman: "Set a slate stone, 16 X 12 X 7 ins., 11 ins. in the ground, for 1/4 sec. cor., marked 1/4 on N. face, from which
- A pine, 5 ins. dia., bears N18°W, 14 lks. dist., marked 1/4 S27 BT.
A pine, 5 ins. dia., bears S45°E, 12 lks. dist., marked 1/4 S34 BT.
- II. Found a stone, 14 X 12 x 6 ins., firmly set, N. face of stone fractured - no visible 1/4 marks, from which
- A downed pine snag, bears N18°W, 9.0 ft. (13.6 lks.) dist., mkd. 1/4 S.
A downed pine snag, bears S45°E, 8.0 ft. (12.1 lks.) dist., mkd. 1/4 S34 BT.
- III. At the corner point, set a 2 1/2 ins. dia. aluminum pipe, 30 ins. long, 24 ins. in the ground with a 3 1/4 ins. diam. aluminum cap, marked as shown:




Bury original stone alongside new monument and raise a collar of stone around pipe.

Established two new bearing trees:

- A larch, 15 ins. dia., bears N10°E, 25.0 ft. dist., mkd. 1/4 S27 BT.
A larch, 13 ins. dia., bears S44°W, 50.1 ft. dist., mkd. 1/4 S34 BT.

Painted a red band around each bearing tree and attached Land Survey Monument and Bearing Tree signs.
Set a 6 ft. galvanized steel guard post with Property Boundary and Survey Marker decals attached, 3 ft. West from corner.
Magnetic Declination: 20° East.

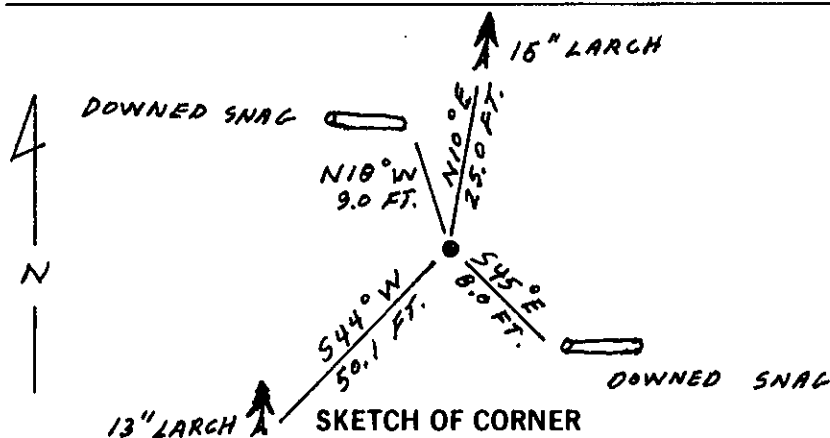

CERTIFICATION

I, Kevin Todd
certify the information shown herein is true and correct.

Kevin Todd
Signature Ground Party Chief

I, Alvah F. Hughes
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the Corner Recordation Act" (70-22-101, et seq.)

Alvah F. Hughes
Signature of Surveyor


Date: 1/2/91 Reg. No. 73222-S

Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on 1-10-91 was noted on the cross-index plat and is assigned page No. 4499, in book No. Coral M Cummings by Bio Backoff

County Official

V-15 Cross Index No. 29 N 28 W T. PMM R.



• - corner this sheet