

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner SE COR. SEC. 8 T. 29N R. 29W P.M.M. Lincoln County

ORIGINAL:

GLO - 1898 - Paul S.A. Bickel

Set a slate stone, 14x8x6, 9" in the ground for corner of Sections 8, 9, 16, and 17, marked 4 notches on south and east edges, from which:

A 4" fir bears N51°20'W, 40 links (26.40 feet) distant, marked T29N R29W S9 BT.

A 12" fir bears S60°E, 47 links (31.02 feet) distant, marked T29N R29W S16 BT.

An 11" tamarack bears S73°45'W, 39 links (25.74 feet) distant, marked T29N R29W S17 BT.

A 6" tamarack bears N38°W, 15 links (9.9 feet) distant, marked T29N R29W S8 BT.

BLM - 1964

Found original stone in place. Set an iron pipe, 26" in the ground and buried original stone alongside, from which:

A 14" Douglas Fir bears N51½°E, 40 links (26.40 feet) distant, overgrown blaze.

A 20" Douglas Fir bears S60°E, 47 links (31.02 feet) distant, overgrown blaze.

A 10" Douglas Fir bears S59°W, 76 links (50.16 feet) distant, marked "T29N R29W S17 BT".

A 9" Douglas Fir bears N71½°W, 45 links (29.70 feet) distant, marked "T29N R29W S 8 BT".

FOUND:

Found a 3½" brass cap on 2½" galvanized pipe, marked as shown below. Found the following original bearing trees:

An 18" Douglas Fir snag bears N51°E, 25.00 feet distant.

A 21" Douglas Fir bears S60½°E, 30.35 feet distant.



An 18" fir bears S57½°W, 50.05 feet distant.

A 17" Douglas Fir bears N73½°W, 30.6 feet distant.

ESTABLISH:

Establish 1 new accessory for this corner.

A 7" Douglas Fir bears N33½°E, 57.1 feet distant, marked "T29N R29W S9 BT".

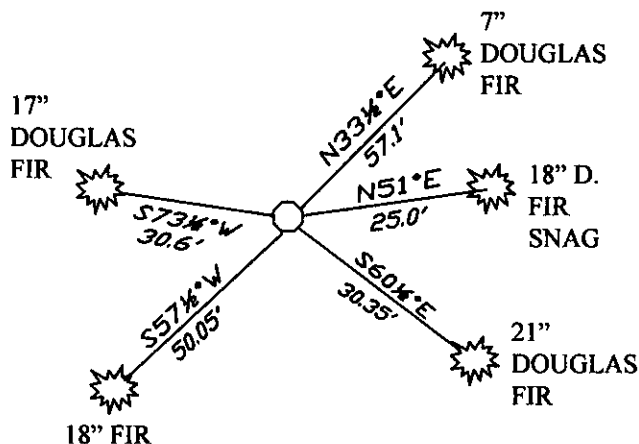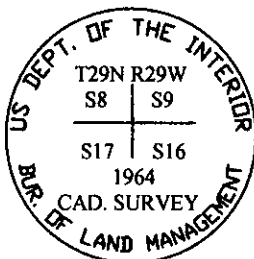

SKETCH OF CORNER

CERTIFICATION

I, James R. Staples

Certify the information shown herein is true and correct.

Signature Ground Party ChiefI, James R. Staples

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.)

Signature of Surveyor & SealDate: 7/7/08 Reg. No. 9958LSEmployer: J.R.S. Surveying, Inc.

Office of Clerk and Recorder, County of _____ This "corner

record" was filed for record on

213020 BOOK: CCR CC&R'S PAGE: 11233 Pages: 1

was noted on the c STATE OF MONTANA LINCOLN COUNTY

RECORDED: 07/22/2008 1:45 KOI: CC&R'S

book no. _____ TAMMY D. LAUER CLERK AND RECORDER

FEE: \$7.00

BY:

TO: J.R.S. SURVEYING P.O. BOX 1050, LIBBY, MONTANA 59923

Cross Index No. J9 T. 29N R. 29W PMM