

CERTIFIED LAND CORNER RECORDATION
(REFERENCE FSH 5681.65)

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

On 7/14/66 Bob Burrell, Surveying Tech. reported the following on, "Report on Corners of the Cadastral Survey Grid":

Found stone in place and two B.T.'s
Set 2½" I.P. 24" in ground, buried
stone along side I.P.
Brass Capp marked

T29N R29W
S10 | S11
1966

P.P. 33" N47°10'E 68 lks ¼S11 Old BT
P.P. 24" N57½°W 87 lks ¼S10 old BT

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:

Date of work: June 22, 1972
1972

Checked the corner this date and found the two BT'S have been cut off above the scribing. The stumps are tagged and marked.

Reset the brass cap which had been pushed over.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

Surveyor's Seal

I,
certify that the information shown herein is true and correct.


.....
Signature of Ground Party Chief

I, Robert F. Burdick
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Robert F. Burdick
Signature of Surveyor

649S
Registration Number

DIAGRAM OF CORNER:

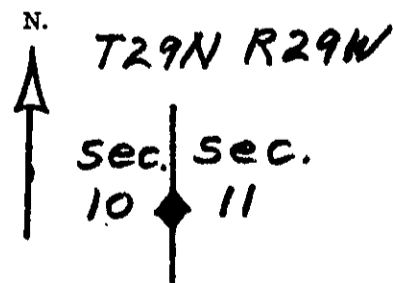

◆ = Corner recorded on the sheet

Office of Clerk and Recorder, County of Lincoln

This "corner record" was filed for record on the 27th day of June 1972, was noted on the cross-index plat and is assigned page No. 290, in book No. 1

Eleanor L. Laughon Mae Wilson, Deputy
County Official

Cross Index No. G-17 T. 29 R. 29 Mer.