

## INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

## CERTIFIED CORNER RECORDATION

Corner 1/4 Cor. of Secs. 25 & 30 T. 29 N. R. 29 W. P.M.M. Lincoln County


- I. 1898 G.L.O. record by Paul S. A. Bickel: "Set a slate stone, 16 x 8 x 8 ins., 11 ins. in the ground, for 1/4 Sec. Cor. marked 1/4 on W. face, from which

A pine, 12 ins. diam., bears  $S61^{\circ}20'E$ , 72 lks. dist., marked 1/4 S30 BT.  
A pine, 22 ins. diam., bears  $S80^{\circ}40'W$ , 169 lks. dist., marked 1/4 S25 BT."

- II. Found a stone 6 x 8 x 16 ins., firmly set, mkd. 1/4 on West face, from which

A dead pine, 18 ins. diam., bears  $S62^{\circ}E$ , 47.5 ft. (72 lks.) dist., visible scribe.  
A dead pine, 28 ins. diam., bears  $S81^{\circ}W$ , 112 ft. (170 lks.) dist., mkd. 1/4 S25 BT.

- III. At determined position, set a 2 1/2 ins. diam. aluminum pipe, 30 ins. long, in mound of stone with 3 1/4 ins. diam., U.S.D.A., Forest Service aluminum cap, marked as shown:



Establish two new Bearing Trees:


A fir, 16 ins. diam., bears  $N63^{\circ}E$ , 26.3 ft. dist., mkd. 1/4 S30 BT.  
A fir, 12 ins. diam., bears  $N65^{\circ}W$ , 26.0 ft. dist., mkd. 1/4 S25 BT.

Painted red bands around the bearing trees and attached Land Survey Monument and Bearing Tree signs.

Bury original stone alongside aluminum pipe monument.

Set a 6 ft. galvanized steel guard post with Land Survey Marker and Property Boundary decals, South, 3 ft.

Magnetic Declination:  $20^{\circ}$  East

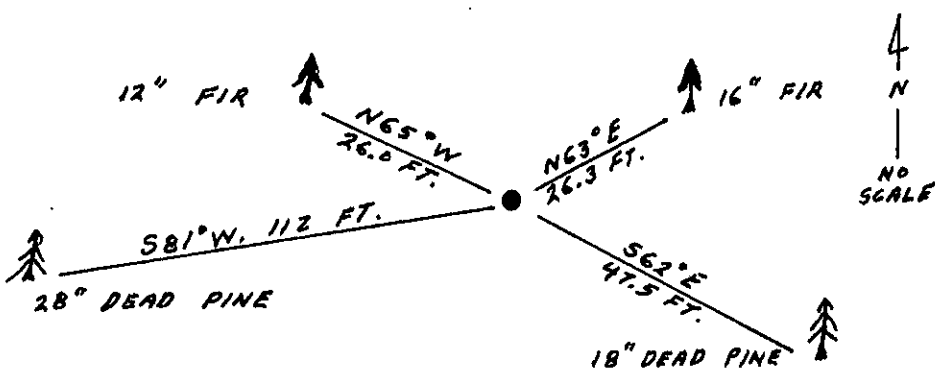

SKETCH OF CORNER



I, Kevin A. Todd  
certify the information shown herein is true and correct.

Signature Ground Party Chief

I, Ronald A. Pearson

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101 et seq., M.C.A.)

Signature of Surveyor & Seal

Date: 1/20/93 Reg. No. 9008LS


Employer: U.S. FOREST SERVICE

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Feb 3, 1993 was noted on the cross-index plat and is assigned page No. 5333, in book No. Coral M. Cummings by SB

County Official

Cross Index No. T-01 T. 29 N. R. 29 W. PMM

Sec. 30



• - corner this sheet