

CERTIFIED CORNER RECORDATION

CORNER S1/16 T. 29 N., R. 30 W., P.M.M. LINCOLN COUNTY

RECORD:

NONE

FOUND EVIDENCE:

NONE

PERPETUATION:


Set a 5/8 inch dia. rebar 24 inches long with a 1 1/4 inch yellow plastic cap stamped 4975-S(see diagram below)
From which:

A 8 inch DBH Douglas Fir scribed S1/16 S17 BT bears N29°W 12.3 ft dist.

A 9 inch DBH Larch scribed X BT bears N60°W 37.0 ft dist.

Painted 6 inch wide bands and attached bearing tree tags to both trees.

MAGNETIC DECLINATION: 16° E

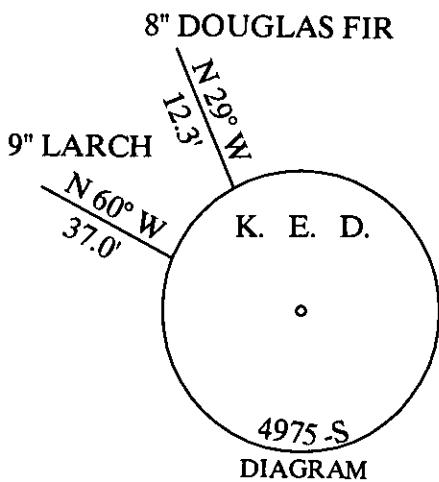

CERTIFICATION

I, _____
Certify the information shown herein is true and correct
Signature of Ground Party Chief

I, [Signature]

certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101 et seq., M.C.A.)

[Signature]
Signature of Surveyor & Seal

Date: 7/1/09 Reg. No. 4975-S


Employer: DAVIS Surveying Inc

SKETCH OF CORNER

219965 BOOK: CCR CC&R'S PAGE: 11303 Pages: 1
STATE OF MONTANA LINCOLN COUNTY
RECORDED: 07/01/2009 2:20 KOI: CC&R'S
TAMMY D. LAUER CLERK AND RECORDER
FEE: \$0.00 BY: [Signature]
FO: FILED

County Official

SECTION



Cross Index No. S1/16 T. 29 N., R. 30 W., P.M.M.

THIS CORNER