- 1. Original and/or subsequent record used to evaluate the corner p

- Description of evidence found, dute discrepancies in the record, state method of establishing lost or obliterated corners
 Description of monument and accessories set to perpetiate the corner polation.
 Sketch or corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
- Certification must be signed and scaled by Registered Land Surveyor in State of Montana
- Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner E 1/16th Sections 1849 29 N. R. 30 W. P.M.M. Lincoln County

At the E 1/16th of Sections 18 and 19

No Original Record to Perpetuate


We set a 5/8 inch diameter by 24 inch long rebar with a yellow PVC plastic cap stamped: MDL 4232 S from which we established the following bearing trees and tags:

An ll inch diameter Lodge Pole Pine bears N32°W 6.9 feet to center of tree scribed El/16 SLB BT near the base of tree.

A 10 inch diameter Lodge Pole Pine bears S41/4°E 28.2 feet to center of tree scribed E 1/16 S19 BT near the base of tree.

Both BTs tagged by KEI {LAD & GEB 5/18/82} and painted red.

A 6 inch diameter Lodge Pole Pine bears \$53°W 7.1 feet with interior Section Location Poster scratched El/16 Section 19 T-29 N. R.30W., P.M.M.

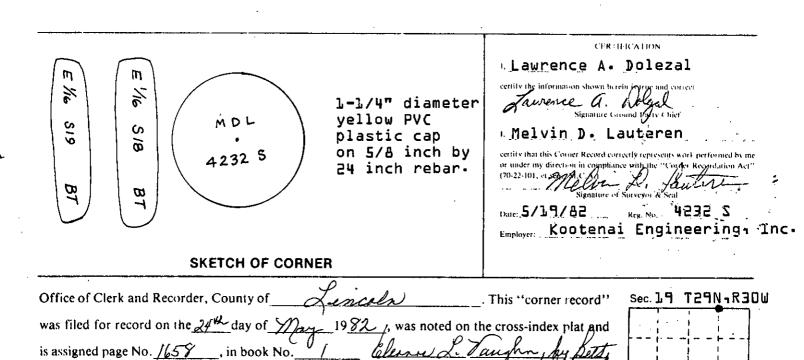

County Official

corner this sheet