

CERTIFIED LAND CORNER RECORDATION

Corner common to Townships 29 and 30 North, Ranges 30 and 31 West, N.M.

DESCRIPTION OF CORNER EVIDENCE FOUND, AND ORIGINAL RECORD (IF KNOWN)

Original record: June 1893.

Set a post $4\frac{1}{2}$ feet long 4" square 24" in the ground for corner to Twps. 29 & 30 N., Rs. 30 and 31 W. marked T 30 N. S. 31 on NE -- R.30 W. S. 6 on SE -- T. 29 S. 1 on SW R. 31 S. 36 on NW faces with 6 notches on each edge - from which
A 14" fir bears N $23\frac{1}{2}^{\circ}$ E 11 lks. marked T 30 N R 30 W S 31 B T
A 12" fir bears S $44\frac{1}{2}^{\circ}$ E 45 lks. marked T 29 N R 30 W S 6 B T
A 24" larch bears S $16^{\circ}45'$ W 63 lks marked T 29 N R 31 W S 1 B T
A 10" fir bears N $32^{\circ}45'$ W 23 lks marked T 30 N R 31 W S 36 B T

*** **

At approximate position for corner found a $1\frac{1}{2}$ " steel well point 8" above ground. Area had been heavily logged and there remained no evidence of the reported witness trees to confirm the position. Accordingly we ran a line from the brass cap marking the west $\frac{1}{4}$ corner of Section 6 to the west $\frac{1}{4}$ corner of Section 31 (both of which are marked by std. brass cap monuments. Line run with Wild 1second theodolite.

DESCRIPTION OF MONUMENT AND ACCESSORIES ESTABLISHED TO PERPETUATE THE ORIGINAL LOCATION OF THIS CORNER:


We reset the well point (which was only about one foot out of position) Date of work: Feb. 1970 at the mid point between the two $\frac{1}{4}$ corners and on line - in conformance with the record.

SEE OTHER SIDE FOR SKETCH AND RECORD OF WITNESS POINTS ETC.

SKETCH, WITH COURSE AND DISTANCE TO ADJACENT CORNERS IF DETERMINED IN THIS SURVEY. (MAY SKETCH OR PASTE REPRODUCTION ON REVERSE SIDE.)

SEE OTHER SIDE

Surveyor's Seal

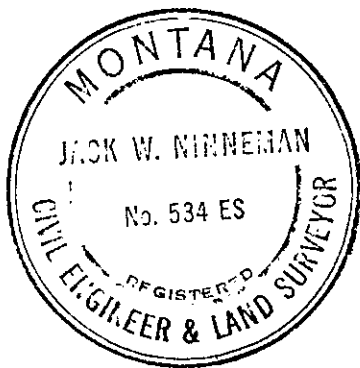

I, Jack H. Ninneman
certify that the information shown herein is true and correct.


Jack H. Ninneman
Signature of Ground Party Chief

I, Jack W. Ninneman
certify that I have carefully performed or reviewed the work done on the diagrammed corner as reported on this recordation form and approve the same.

Jack W. Ninneman
Signature of Surveyor

534 ES
Registration Number

DIAGRAM OF CORNER:

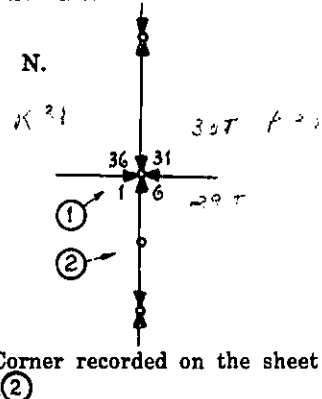

Office of Clerk and Recorder, County of Lincoln
This "corner record" was filed for record on the 2nd day of March 1970, was noted on the cross-index plat and is assigned page No. 177, in book No. 1
ELEANOR L. VAUGHN, By: Mac Watson Deputy.

LINCOLN COUNTY, MONTANA

SURVEY TO CORRECT SECTION TIE STATE HIGHWAY PROJECT S325-(1)

RECORDATION DATA

Std. Brass Cap Monument
By B.L.M.

By Ninneman Engineering
Set 1 1/2" Steel Well Point
36" long ~ 8" above ground
From which
A 10" Fir bears N46°E 47.5'
Scribed S 31 BT and Posted
A 10" Fir bears S27°40'E 62.0'
Scribed S 6 BT and Posted
A 14" Fir bears S26°W 22.9'
Scribed S 1 BT and Posted
A 12" Fir bears N18°W 25.2'
Scribed S36 BT and Posted

Set a 1 1/2" Pipe-30" long
4" above ground for 1/16 Corner
From which
A 20" Larch stump-9' high
bears S70°W - Posted
A 14" Pine bears N45°W 33.6'
Tagged with location poster

Std. Brass Cap Monument
By B.L.M.

Sec. 1 Twp. 29 N., R. 31 W.

Sec. 6 Twp. 29 N., R. 30 W.

CREEK

GUIDE MERIDIAN

LIBBY

STATE HIGHWAY PROJECT S325-(1)

Lot 4

Lot 5

Scale: 1 Inch = 30 Feet.
February 1970

Ninneman Engineering Troy, Montana