COLLIER

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners
3. Description of monument and accessories set to perpetuate the corner position
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Registered Land Surveyor in State of Montana
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner W 1/16 S 6/7 T. 29 N. R. 30 W. P.M.M. LINCOLN County

NO ORIGINAL RECORD.

NO EVIDENCE FOUND, OTHER THAN EXISTING FENCE CORNER.

SET 5/8" X 24" REBAR CAPPED: MDL 4232 S, FROM WHICH:

A 19 INCH DIAMETER SCHOOLMARM FIR BEARS S62° W 56.48' FEET SCRIBED "W 1/16 S 7 BT", AND TAGGED.

AN 18 INCH DIAMETER LARCH BEARS N18° W 40.86 FEET SCRIBED "W 1/16 S 6 BT", AND TAGGED.

DISTANCES MEASURED TO ALUMINUM NAIL IN SIDE OF TREE.

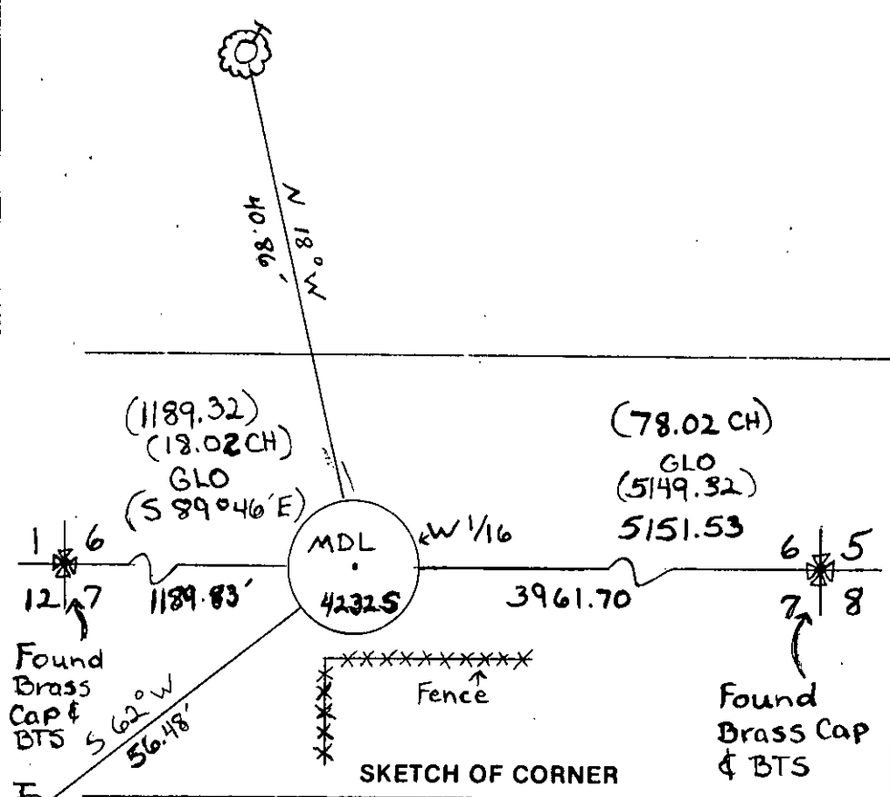

SKETCH OF CORNER

CERTIFICATION

I, GERALD E. BUNTON

certify the information shown hereon true and correct.

Signature Ground Party Chief

I, MELVIN D. LAUTEREN

certify that this Corner Record correctly represents work performed by me or under my direct supervision in compliance with the "Corner Recordation Act" (70-22-0[illegible] M.C.A.)

Signature of Surveyor & Seal

Date: 8/11/82 Reg. No. 4232 S

Employer: KOOTENAI ENGINEERING, INC.

Office of Clerk and Recorder, County of LINCOLN. This "corner record" was filed for record on the 26 day of OCT. 19 82, was noted on the cross-index plat and is assigned page No. 2005, in book No. _____ Eleanor L. Vaughn by Betty L. Cornes Deputy

County Official

Cross Index No. ~~B-5~~ E-2 T. 29 N R. 30 W PMM

Sec. 7



• - corner this sheet