

INSTRUCTIONS

1. Original and/or subsequent record used to evaluate the corner position.
2. Description of evidence found, note discrepancies in the record, state method of establishing lost or obliterated corners.
3. Description of monument and accessories set to perpetuate the corner position.
4. Sketch of corner, show all pertinent data which can best be shown in a sketch example, corner marking, topography ties, position of accessories, etc.
5. Certification must be signed and sealed by Land Surveyor registered in the State of Montana.
6. Fill in Cross Index & Section Diagram at bottom of sheet.

CERTIFIED CORNER RECORDATION

Corner S. 1/4 S33 only T. 29 N. R. 30 W. P.M.M. Lincoln County

I. 1893 G.L.O. original record by Daniel P. Mumbrue: Set a stone monument and three bearing trees.

1964 BLM remonumentation by Pittman et al: "The standard 1/4 sec. cor. of sec. 33, monumented with a disintegrated wooden post, firmly set in the ground, and witnessed by the remains of the original bearing trees.

At the corner point, set an iron post, 30 ins. long, 2 1/2 ins dia., 27 ins. in the ground, with brass cap mkd.

SC
T29N R30W
1/4 S33
1964

from which

The remains of the original bearing trees:

A stump, 24 ins. dia., bears S54°W, 65 lks. dist.

A stump, 22 ins. dia., bears N37 3/4°W, 61 lks. dist.

The new bearing trees:

A pine, 6 ins. dia., bears N5°W, 22 lks. dist., mkd. SC 1/4 S33 BT.

A pine, 7 ins. dia., bears N70°W, 38 lks. dist., mkd. X BT.

Bury the remains of the original wooden post alongside of the post.

II. Found an iron post, 2 1/2 ins. dia., 6 ins. above the ground with a 3 1/4 ins. dia.,

BLM brass cap mkd. as shown above, from which

A pine snag, 9 ins. dia., bears N5°W, 14.6 ft. (22.1 lks.) dist., mkd. SC 1/4 S33 BT.

A ponderosa pine, 11 ins. dia., bears N69°W, 25.2 ft. (38.2 lks.) dist., mkd. X BT.

III. Establish a new bearing tree:

A douglas fir, 6 ins. dia., bears N2°W, 9.8 ft. dist, mkd. SC 1/4 S33 BT.

Painted a red band around each bearing tree and attached Land Survey Monument and Bearing Tree signs.

Set a 6 ft. galvanized steel guard post, with Survey Marker and Property Boundary decals attached, 3 ft. West of monument.

Magnetic Declination: 19° East.

CERTIFICATION

I, Mark Federman
certify the information shown herein is true and correct.

Signature Ground Party Chief


I, Alvah F. Hughes
certify that this Corner Record correctly represents work performed by me or under my direction in compliance with the "Corner Recordation Act" (70-22-101, et seq., M.C.A.).

Alvah F. Hughes
Signature of Surveyor & Seal UGHES

Date: 12/26/89 Reg. No. 7322


Employer: U.S. FOREST SERVICE

SKETCH OF CORNER

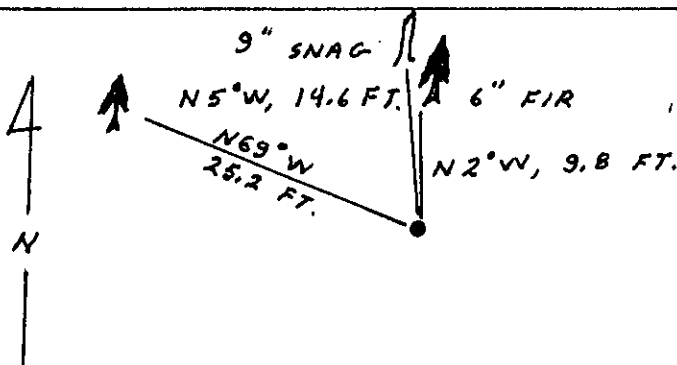

Office of Clerk and Recorder, County of Lincoln. This "corner record" was filed for record on Jan 3, 1991 was noted on the cross-index plat and is assigned page No. 4459, in book No. _____

Z-11 29 N 30 W
Cross Index No. _____ T. _____ R. _____ PMM

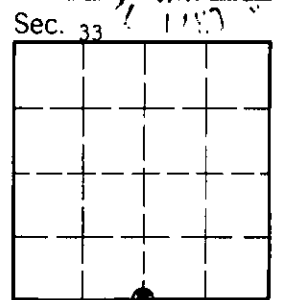

• - corner this sheet